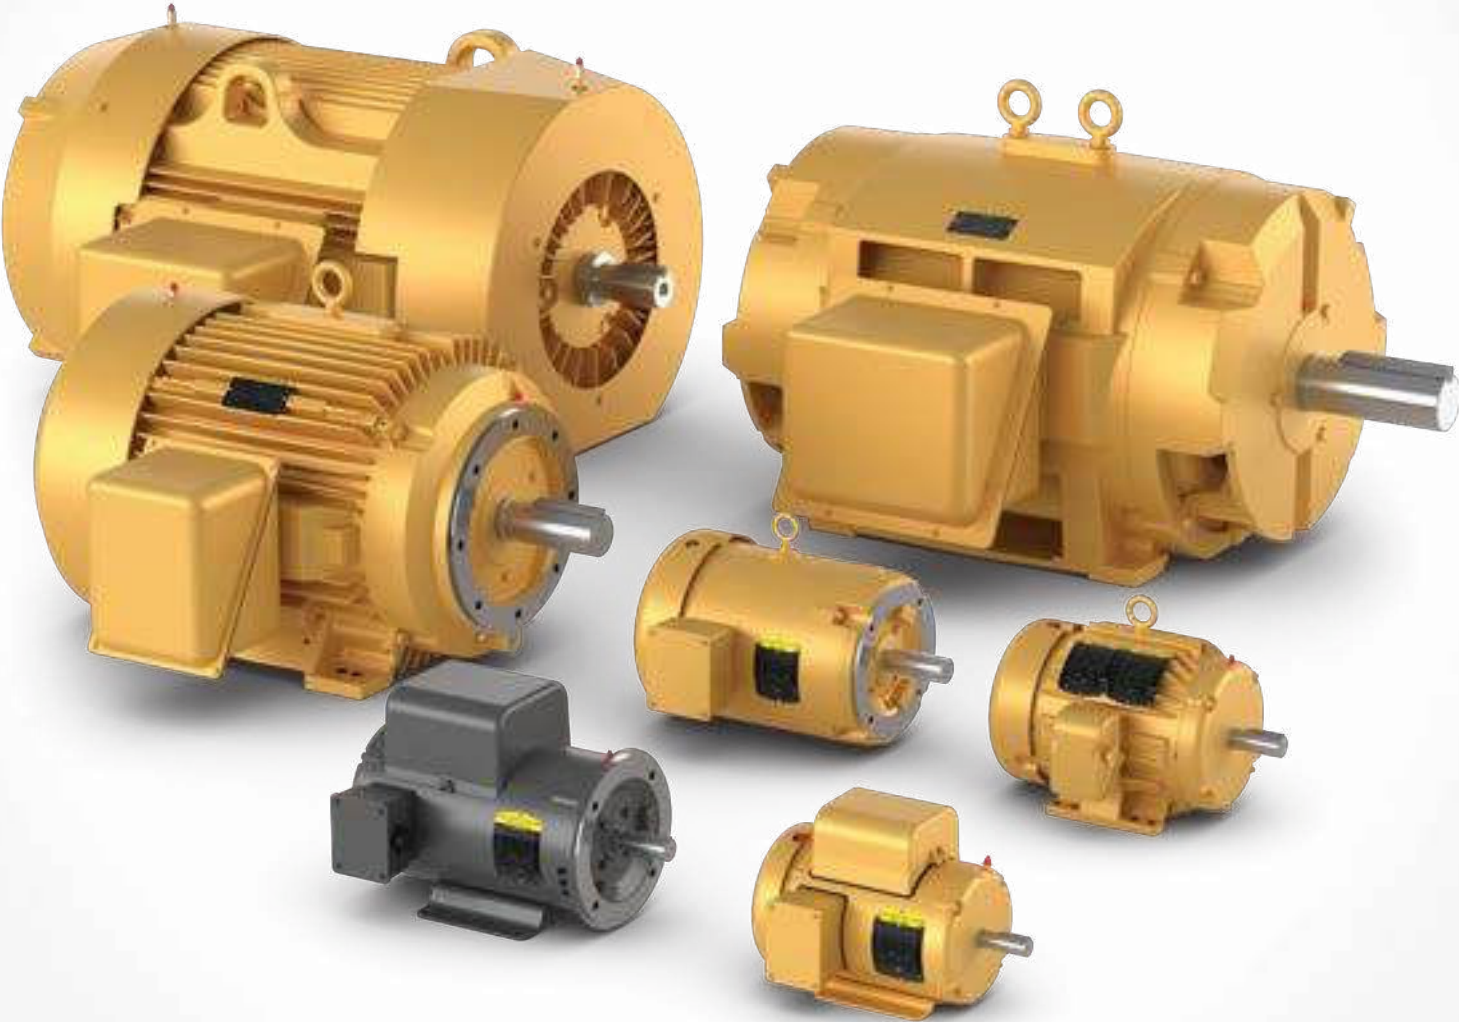

General Purpose Single and Three phase motors



General Purpose Single and Three phase motors

ABB's Baldor-Reliance general purpose motors are reliable and energy-efficient, meeting NEMA standards to cut costs and support sustainability. Durable and versatile, they perform well in various industrial applications, from clean to moderate environments, demonstrating high-quality engineering and long-lasting performance.



General Purpose, single phase, enclosed



General Purpose, single phase, open



General Purpose, three phase, enclosed



General Purpose, three phase, open



GNEM, General Purpose, three phase, Open



GNEM, General Purpose, three phase, enclosed

General Purpose Product Line		Totally enclosed (single phase)	Open (single phase)	Totally enclosed (three phase)	Open (three phase)
NEMA Frame	Frame size range for stock products	42-250T	48-210T	42-449T	48-449T
Hp	Horsepower NEMA	1/6 - 10	1/8 - 400	1/8 - 400	1/4 - 450
Voltage 60 Hz	115/208-230 or 115/230 volts	S	S	-	-
	200 volts	-	-	S	S
	230/460 volts	-	-	S	S
	460 volts	-	-	S	S
	575 volts	-	-	S	S
	2300/4000 volts	-	-	S	A
Speed	Speed (60 Hz)	3600, 1800, or 1200 RPM	3600, 1800, or 1200 RPM	3600, 1800, 1200, or 900 RPM	3600, 1800, 1200, or 900 RPM
Electrical Features					
Efficiency	Baldor-Reliance motors meet or exceed all efficiency requirements for US, Canada and Mexico regulations	S	S	S	S
Torque	NEMA Design B torques (most ratings)	S	S	S	S
Service factor	1.15 service factor – continuous (most ratings)	S	S	S	S
Temp rise	Class F insulation with Class B rise @ 1.0 service factor	S	S	S	S
Inverter ready	Super E® – meets NEMA MG1 Part 31.4.4.2	-	-	S	S
Electrical connection	6 Lead dual voltage connection	S	S	-	-
	9 Lead dual voltage connection	-	-	S	S
	12 Lead wye delta connection	-	-	S	S
Mechanical Features					
IP code	IP22 ingress protection	-	S	-	S
	IP44 ingress protection	S	-	S	-
	IP54 ingress protection (ABB NXR Series are IP54 as standard)	A	-	A/S	-
Frame	Heavy gauge steel frame	S	S	S	S
	Cast iron frame	A	-	S	A
	Lifting provisions positioned for easy handling in the application	S	S	S	S
	(motors over 70 Lbs)				
Bearings	High performance ball bearings designs	S	S	S	S
	Roller bearing design -TR suffix	-	-	S	A
Lubrication	Super-premium Mobil Polyrex™ EM Series grease	S	S	S	S
Conduit box	Cast aluminum	S	S	S	S
	Gasketed cast aluminum	S	-	S	A
	Gasketed cast iron frame	-	-	S	A
Nameplate	Laser etched nameplate with highly legible font	S	S	S	S
	50 Hz stamping (2, 4, 6 pole 1-125 Hp) on Super E® motors	A	A	S	A
Other Key Features					
Warranty	Warranty - in number of months from manufacture (NEMA Premium Super E®)	36	36	36	36
	Warranty - in number of months from manufacture	18	18	18	18

S = Standard A = Available through Mod Express® or as custom

General Purpose, single phase, enclosed 1/12 thru 15 Hp

Features

- Low noise vibration dampening base
- Dynamically balanced rotor to increase bearing life
- Superior switch design provides optimized torque profiles
- Robust heavy gauge steel design

Applications

- Fans
- Air handling
- Conveyors
- Pumps
- Material handling
- Machine tools

IP44

General Purpose, single phase, TEFC, foot mounted



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
115/230 volt											
1/12	1800	42	L3351	525	GE1	9.56	15	44.0	115/230	1.0	3, 30
	3600	42	L3352	537	GE1	9.56	15	45.0	115/230	1.3	3, 30
1/8	1800	42	L3353	547	GE1	9.56	16	47.0	115/230	1.6	3, 30
	3600	42	L3354	563	GE1	9.56	16	52.0	115/230	1.6	3, 30
1/6	1800	42	L3355	596	GE1	9.56	18	51.0	115/230	1.8	3, 30
		48	L3400	594	GE1	10.72	18	49.0	115/230	1.9	3, 30
	1200	48	L3401	837	GE1	10.72	23	47.0	115/230	2.3	3, 30
1/4	3600	42	L3356	603	GE1	9.56	18	57.0	115/230	2.0	3, 30
		48	EL3403	744	GE1	11.35	24	74.0	115/230	1.3	1, 13, 65
	1800	48	L3403	609	GE1	10.72	20	55.0	115/230	2.5	3, 30
		48	L3403M	698	GE1	10.72	11	55.0	115/230	2.5	3, 30
	1200	48	L3404	891	GE1	11.34	25	48.0	115/230	3.2	3, 30
1/3		56	L3500	935	GE1	12.23	30	52.5	115/230	2.6	3, 30
	3600	48	L3405	555	GE1	10.72	21	55.0	115/208-230	3.0	3
		48	L3406	647	GE1	10.72	22	60.0	115/230	3.0	3, 30
		48	L3406M	734	GE1	10.72	22	60.0	115/230	3.0	3, 30
	1800	56	EL3501	822	GE1	11.97	27	77.0	115/230	1.6	1, 13, 65
		56	L3501	626	GE1	11.34	22	60.0	115/230	3.0	3, 30
		56	L3501M	734	GE1	11.34	22	60.0	115/230	3.0	3, 30
		48	L3407	980	GE1	11.34	27	54.0	115/230	3.7	3, 30
	1200	56	L3502	980	GE1	11.97	28	54.0	115/230	3.7	3, 30
		48	L3408	627	GE1	10.73	22	66.0	115/230	3.5	3, 30
1/2	3600	56	EL3503	807	GE1	11.97	23	68.0	115/230	2.5	12, 65
		56	L3503	627	GE1	11.35	23	66.0	115/230	3.5	3, 30
		48	L3409	718	GE1	11.34	26	68.0	115/230	3.7	3, 30
	1800	48	L3409M	863	GE1	11.34	26	68.0	115/230	3.7	3, 30
		56	EL3504	970	GE1	11.97	30	78.5	115/230	2.3	1, 12, 65

Cast iron frame

General Purpose, single phase, TEFC, foot mounted

Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
115/230 volt											
1/2	1800	56	L3504	734	GE1	11.97	27	68.0	115/230	3.7	3, 30
		56	L3504A	878	GE1	11.97	27	68.0	115/230	3.7	3, 30
		56	L3504M	863	GE1	11.97	27	68.0	115/230	3.7	3, 30
3/4	1200	56H	L3505	1,388	GE1	12.91	43	62.5	115/230	3.9	3, 30, 36
	3600	56	EL3506	907	GE1	11.97	29	72.0	115/230	3.9	12, 65
		56	L3506	706	GE1	11.97	28	66.0	115/230	4.8	3, 30
	1800	56	EL3507	1,179	GE1	13.25	44	82.5	115/208-230	3.2	1, 12, 65
		56	L3507	845	GE1	12.47	33	72.0	115/230	4.2	30, 65
		56	L3507A	1,059	GE1	12.47	35	74.0	115/230	4.1	30, 65
56		L3507M	1,013	GE1	12.47	33	74.0	115/230	4.1	30, 65	
1200	56H	L3508	1,607	GE1	12.93	44	74.0	115/230	4.2	2, 30, 36, 65	
143T	L3508T	1,581	GE1	13.29	46	74.0	115/230	4.2	2, 30, 65		
1	3600	56/56H	L3509M	925	GE1	12.91	40	66.0	115/230	6.0	3, 36
		56/56H	L3509	818	GE1	12.93	37	68.0	115/230	5.9	3, 30, 36
		56H	EL3509	1,047	GE1	12.91	38	74.0	115/208-230	4.7	12, 65
	1800	56/56H	L3510M	1,149	GE1	12.91	38	67.0	115/230	6.5	3, 30, 36
		56H	EL3510	1,355	GE1	12.91	45	80.0	115/230	4.7	1, 36, 65
		56H	L3510	958	GE1	12.91	41	68.0	115/230	6.2	3, 30, 36
		56H	L3510A	1,191	GE1	12.91	40	67.0	115/230	6.5	3, 30, 36
	143T	L3510T	978	GE1	13.29	39	68.0	115/230	6.4	3, 30	
	143T	L3510TM	1,149	GO1	13.29	40	67.0	115/230	6.5	3, 30	
	11/2	3600	56/56H	L3513	1,097	GE1	12.91	41	70.0	115/230	8.0
56/56H			L3513M	1,255	GE1	12.91	46	70.0	115/230	7.5	2, 3, 36
143T			L3513T	1,075	GE1	13.29	43	70.0	115/230	8.0	3, 30
1800		56/56H	L3514A	1,411	GE1	13.79	48	75.5	115/230	8.0	2, 36, 65
		56/56H	L3514M	1,298	GE1	13.81	51	75.5	115/208-230	7.9	2, 36, 65
		56H	EL3514	1,543	GE1	13.79	58	80.0	115/230	6.1	1, 36, 65
		56H	L3514	1,107	GE1	13.81	49	80.0	115/230	6.1	30, 36, 65
145T		EL3514T	1,543	GE1	14.16	58	80.0	115/230	6.1	1, 65	
145T		L3514T	1,123	GE1	14.16	44	80.0	115/208-230	6.1	65	
145T		L3514TM	1,298	GO1	14.16	49	75.5	115/208-230	7.9	2, 65	
1200	184T	L3613T	2,934	GE1	16.56	77	73.0	115/230	8.2	1, 30, 65	
2	3600	56/56H	L3515	1,400	GE1	13.79	52	74.0	115/230	11.5	1, 3, 30, 36
		56/56H	L3515M	1,466	GE1	13.79	52	74.0	115/230	11.5	2, 3, 36
		143T	EL3515T	1,810	GE1	14.16	65	77.0	115/208-230	8.3	1, 65
	1800	145T	L3515T	1,411	GE1	14.16	52	74.0	115/230	11.5	1, 3, 30
		145T	L3516T	1,793	GE1	15.53	51	80.0	115/230	8.2	1, 65
		182T	EL3605T	2,109	GE1	16.56	66	82.5	115/230	8.8	1, 65
		182T	L3605T	1,602	GE1	16.56	67	75.5	115/230	11.5	3, 30
182T	L3605TM	1,955	GO1	16.56	73	75.0	115/230	11.0	2, 3		
3	3600	182T	EL3606T	1,969	GE1	16.56	79	82.0	115/230	12.4	2, 65
		182T	L3606T	1,655	GE1	16.56	74	76.0	115/230	14.5	1, 3, 30
1800	184T	L3609T	1,885	GE1	16.56	80	78.0	115/230	14.0	2, 20, 30, 65	
230 volt											
3	1800	184T	EL3609T	2,462	GE1	18.06	89	85.5	230	11.8	1, 65
5	3600	184T	EL3608T	2,714	GE1	18.06	91	85.0	230	19.4	2, 20, 65
		184T	L3608T	2,276	GE1	18.06	88	83.0	230	19.5	2, 20, 65

Cast iron frame

General Purpose, single phase, TEFC, foot mounted

Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Full Load Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230 volt											
5	1800	184T	EL3612T	2,936	GE1	18.06	97	86.5	230	19.1	2, 20, 65
		213T	L3708T	2,251	GE1	19.02	116	84.0	230	20.5	1, 30, 65
		213T	L3708TM	2,643	GO1	19.02	135	82.0	230	21.5	2, 65
7 1/2	3600	213T	L3709T	2,931	GE1	17.89	123	83.0	230	33.0	2, 30, 65
	1800	215T	L3710T	2,972	GE1	19.02	134	86.5	230	29.0	2, 20, 30, 65
10	3600	215T	L3711T	3,593	GE1	19.02	148	82.0	230	40.0	2, 20, 65
	1800	215T	L3712T	3,647	GE1	20.52	158	86.5	230	38.0	2, 20, 65
15	1800	254T	L1177T	10,387	GE1	23.36	307	86.5	230	60.0	2, 20, 65
		256T	L3912T	9,328	GE1	24.56	300	86.5	208-230	58.0	

Cast iron frame

General Purpose, single phase, TEFC, C-face foot mounted


Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Full Load Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
115/230 volt											
1/4	1800	56C	CL3403	644	GE1	11.35	20	55.0	115/208-230	2.5	3
1/3	3600	56C	CL3405	642	GE1	11.35	21	55.0	115/208-230	3.0	3
	1800	56C	CL3501	672	GE1	11.35	23	60.0	115/208-230	3.0	3, 30
1/2	3600	56C	CL3503	673	GE1	11.35	23	66.0	115/208-230	3.2	3, 30
	1800	56C	CL3504	785	GE1	11.35	28	68.0	115/208-230	3.7	3, 30
3/4	3600	56C	CL3506	749	GE1	11.97	29	66.0	115/208-230	4.8	3, 30
	1800	56C	CL3507	937	GE1	12.47	34	72.0	115/208-230	4.2	30, 65
1	3600	56C	CL3509	866	GE1	12.23	36	68.0	115/208-230	5.9	3, 30
	1800	56C	CL3510	1,057	GE1	13.23	40	68.0	115/230	6.2	3, 30
1 1/2	3600	56C	CL3513	1,121	GE1	13.23	46	70.0	115/208-230	7.5	3, 30
	1800	56C	CL3514	1,255	GE1	14.10	51	80.0	115/230	6.1	30, 65
2	3600	56C	CL3515	1,446	GE1	14.10	50	74.0	115/208-230	11.5	1, 3, 30
		145TC	CL3515T	1,457	GE1	14.16	53	74.0	115/208-230	11.5	1, 3, 30
230 volt											
7 1/2	3600	213TC	CL3709T	3,343	GE1	18.63	126	83.0	208-230	33.0	2, 20, 65
	1800	215TC	CL3710T	3,384	GE1	19.75	127	86.5	208-230	29.0	2, 20, 30, 65
10	3600	215TC	CL3711T	4,265	GE1	19.75	167	82.0	208-230	40.0	2, 20
	1800	215TC	CL3712T	4,316	GE1	21.25	171	86.5	208-230	38.0	2, 20

General Purpose, single phase, TEFC, C-face footless



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Full Load Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
115/230 volt											
1/6	1800	56C	KL3400	626	GE1	11.35	19	49.0	115/230	1.9	3, 30
	1200	56C	KL3401	876	GE1	11.35	24	47.0	115/230	2.3	3, 30
1/4	1800	56C	KL3403	644	GE1	11.35	20	55.0	115/230	2.5	3, 30
1/3	3600	56C	KL3405	594	GE1	11.35	24	55.0	115/208-230	3.0	3
	1800	56C	VL3501	659	GE1	11.35	22	60.0	115/230	3.0	3, 30
1/2	3600	56C	VL3503	667	GE1	11.35	23	66.0	115/230	3.5	3, 30
	1800	56C	VL3504	771	GE1	11.35	27	68.0	115/230	3.7	3, 30
1/2	1200	56C	VL3505	1,426	GE1	13.25	43	62.5	115/230	3.9	3, 30
	3600	56C	VL3506	741	GE1	11.97	29	66.0	115/230	4.8	3, 30
3/4	56C	VL3506A	818	GE1	11.97	28	66.0	115/230	4.8	3	
	1800	56C	VL3507	883	GE1	12.47	33	72.0	115/230	4.2	1, 30, 65
3/4	1200	56C	VL3508	1,640	GE1	13.23	44	74.0	115/230	4.2	2, 30, 65
	3600	56C	VL3509	853	GE1	12.25	36	68.0	115/230	5.9	3, 30
1	56C	VL3509A	932	GE1	13.25	41	66.0	115/230	6.0	3	
	1800	56C	VL3510	1,011	GE1	13.25	40	68.0	115/230	6.2	3, 30
1	143TC	VL3510T	1,011	GE1	13.29	44	68.0	115/230	6.4	3, 30	
	3600	56C	VL3513	1,108	GE1	13.25	40	70.0	115/230	8.0	3, 30
1 1/2	143TC	VL3513T	1,177	GE1	13.29	41	70.0	115/230	8.0	3, 30	
	1800	56C	VL3514	1,146	GE1	14.12	48	80.0	115/230	6.1	30, 65
1 1/2	145TC	VL3514T	1,159	GE1	14.17	50	80.0	115/230	6.1	30, 65	
	3600	56C	VL3515	1,419	GE1	14.12	50	74.0	115/208-230	11.5	1, 3
2	145TC	VL3515T	1,446	GE1	14.16	51	74.0	115/230	11.5	1, 3, 30	
	1800	182TC	VL3605T	2,048	GE1	16.55	66	75.5	115/230	11.5	3, 30
3	3600	182TC	VL3606T	2,286	GE1	16.55	73	76.0	115/230	14.5	1, 3, 30
	1800	184TC	VL3609T	2,419	GE1	16.55	79	78.0	115/230	14.0	2, 20, 30, 65

General Purpose, single phase, 50Hz, TEFC, foot mounted

All motors listed are specifically designed for operation with 50Hz power
CE Certified and Compliant to EU efficiency regulations



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
110/220 volt, 50HZ											
1/3	1500	56	L3501-50	741	5E1	11.34	25	59.0	110/220	3.2	1
	3000	56	L3503-50	725	5E1	11.35	27	68.0	110/220	3.3	
1/2	1500	48	L3409-50	843	5E1	12.22	31	62.0	110/220	3.6	
		56	L3504-50	843	5E1	12.84	32	62.0	110/220	3.6	
3/4	3000	56	L3506-50	809	5E1	12.23	35	62.0	110/220	4.6	
	1500	56	L3507-50	1,001	5E1	13.25	38	66.0	110/220	4.8	
1	3000	56	L3509-50	940	5E1	13.23	40	68.0	110/220	6.3	
	1500	56	L3510-50	1,151	5E1	14.10	47	68.0	110/220	5.9	
1 1/2	1500	56	L3513-50	1,238	5E1	14.10	48	68.0	110/220	9.0	1
		145T	L3514T-50	1,301	5E1	14.13	46	77.0	110/220	7.2	
2	3000	56	L3515-50	1,610	5E1	14.11	53	77.0	110/220	9.7	1
	1500	182T	L3605T-50	1,839	5E1	16.56	76	81.0	110/220	10.0	
3	1500	184T	L3609T-50	2,165	5E1	18.06	95	84.5	110/220	12.5	2
220 volt											
5	1500	213T	L3708T-50	2,589	5E1	17.89	119	84.0	220	22.0	2

General Purpose, single phase, 50Hz, TEFC, C-face footless

All motors listed are specifically designed for operation with 50Hz power
CE Certified and Compliant to EU efficiency regulations



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
110/220 volt, 50HZ											
1/3	1500	56C	VL3501-50	813	5E1	11.35	17	59.0	110/220	3.2	1
1/2	3000	56C	VL3503-50	738	5E1	11.35	25	68.0	110/220	3.3	
	1500	56C	VL3504-50	942	5E1	12.85	31	62.0	110/220	3.6	
3/4	3000	56C	VL3506-50	850	5E1	12.25	35	62.0	110/220	4.6	
	1500	56C	VL3507-50	1,116	5E1	13.25	39	66.0	110/220	4.8	
1	3000	56C	VL3509-50	1,000	5E1	13.25	40	68.0	110/220	6.3	
	1500	56C	VL3510-50	1,278	5E1	14.10	47	68.0	110/220	5.9	
1 1/2	3000	56C	VL3513-50	1,286	5E1	14.10	48	79.6	110/220	6.5	1
	1500	56C	VL3514-50	1,444	5E1	14.12	51	77.0	110/220	7.2	
2	3000	56C	VL3515-50	1,632	5E1	14.12	52	77.0	110/220	9.7	1

General Purpose, single phase, open 1/6 thru 10 Hp

Features

- Low noise vibration dampening base
- Dynamically balanced rotor to increase bearing life
- Superior switch design provides optimized torque profiles
- Robust heavy gauge steel design
- Optimized airflow design providing higher horsepower in a smaller package

Applications

- Machine tools
- Air handling
- Conveyors
- Pumps
- Material handling
- Fans

IP22

General Purpose, single phase, ODP, foot mounted



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
115/230 volt											
1/6	1800	48	L1200	494	GO1	9.13	18	49.0	115/230	1.9	30
	1200	48	L1201	757	GO1	9.38	23	47.0	115/230	2.3	30
1/4	1800	48	EL11203	678	GO1	9.76	19	68.5	115/230	1.3	15
		48	EL11203M	723	GO1	9.76	19	68.5	115/230	1.3	15
	1200	48	EL11204	809	GO1	9.76	25	64.0	115/230	1.5	15
		56	EL11300	841	GO1	10.13	25	64.0	115/230	1.5	15
1/3	3600	48	EL11205	716	GO1	9.76	24	70.5	115/230	1.5	15
		48	EL11206	729	GO1	9.76	27	72.4	115/230	1.7	15
	1800	48	EL11206M	774	GO1	9.76	27	72.4	115/230	1.7	15
		56	EL11301	729	GO1	10.13	27	72.4	115/230	1.7	15
	56	56	EL11301M	774	GO1	10.13	27	72.4	115/208-230	1.7	15
		1200	48	EL11207	863	GO1	9.76	27	68.0	115/230	1.9
	56		EL11302	863	GO1	10.13	30	68.0	115/230	1.9	15
	1/2	3600	48	EL11208	762	GO1	9.76	24	72.4	115/230	2.5
56			EL11303	762	GO1	10.13	24	72.4	115/230	2.5	15
1800		48	EL11209	818	GO1	10.63	32	76.2	115/230	2.4	15
		48	EL11209M	863	GO1	10.63	32	76.2	115/230	2.2	15
		56	EL11304	818	GO1	11.00	32	76.2	115/230	2.4	15
		56	EL11304A	863	GO1	11.00	32	76.2	115/230	2.3	15
1200		56H	EL11305	1,296	GO1	11.75	46	76.2	115/230	2.2	15
3/4		3600	56	EL11306	797	GO1	11.00	39	76.2	115/230	3.3
	56		EL11306A	841	GO1	11.00	39	76.2	115/230	3.3	15
	1800	56	EL11307	975	GO1	12.07	39	82.5	115/230	3.1	15
		56	EL11307A	1,019	GO1	12.07	39	81.8	115/230	3.4	15
56	EL11307M	1,019	GO1	12.07	39	81.8	115/230	3.4	15		

General Purpose, single phase, ODP, foot mounted

Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes	
115/230 volt												
3/4	1200	56H	EL11308	1,459	GO1	12.62	47	81.5	115/208-230	3.2	15	
		56	EL11309	935	GO1	12.07	43	82.0	115/230	3.9	15	
	1800	3600	56	EL11309A	978	GO1	12.07	43	82.0	115/230	3.9	15
			56H	EL11318	1,123	GO1	11.75	44	82.6	115/230	4.4	15
		56H	EL11318M	1,166	GO1	11.75	44	82.6	115/230	4.5	15	
		143T	L1318T	995	GO1	12.13	43	67.0	115/230	6.2	30	
		143T	L1318TM	1,037	GO1	12.13	42	67.0	115/230	6.2	2	
		11 1/2	3600	56H	EL11313	1,062	GO1	12.62	52	82.0	115/230	5.9
	56H			EL11313A	1,107	GO1	12.63	52	82.0	115/230	5.9	15
	143T			L1313T	942	GO1	11.13	36	70.0	115/230	8.9	30
1800	56H		EL11319	1,337	GO1	14.00	59	83.8	115/230	6.4	15	
	56H		EL11319M	1,446	GO1	14.00	59	83.8	115/230	6.2	15	
	145T		EL1319T	1,485	GO1	13.00	50	83.8	115/208-230	6.4	1, 65	
	145T		L1319T	1,060	GO1	12.13	42	68.0	115/230	9.0	30	
	145T		L1321T	1,273	GO1	14.38	49	75.5	115/230	7.8	30	
	145T		L1321TM	1,382	GO1	13.00	48	70.0	115/208-230	9.6		
	2		3600	56H	EL11317	1,174	GO1	14.00	66	82.9	115/230	7.8
56H		EL11317A		1,219	GO1	14.00	66	82.9	115/230	7.8	15	
143T		L1320T		1,342	GO1	12.13	46	71.0	115/230	11.5	30, 65	
1800		145T	L1322T	1,298	GO1	13.00	49	75.5	115/208-230	10.2	65	
		145T	L1322TM	1,413	GO1	13.00	45	78.5	115/230	9.2	65	
		182T	EL1405T	1,797	GO1	15.87	65	82.5	115/230	8.8	1, 65	
3	3600	182T	L1405T	1,332	GO1	15.00	66	71.0	115/230	12.0	30	
		182T	EL1406T	1,892	GO1	15.00	70	81.0	115/230	12.3	65	
	1800	182T	L1406T	1,526	GO1	15.00	65	78.0	115/230	14.0	30	
1800	184T	L1408T	1,442	GO1	15.00	76	78.0	115/230	16.0	30, 65		
230 volt												
3	1800	184T	EL1408T	1,880	GO1	16.50	81	85.5	208-230	11.2	1, 65	
		3600	184T	EL1409T	2,246	GO1	15.00	79	81.5	230	20.0	65
	5	3600	184T	L1409T	1,816	GO1	15.00	78	75.0	230	23.0	30
			184T	EL1410T	2,147	GO1	18.00	97	86.5	230	19.1	1, 65
		1800	184T	L1410T	1,517	GO1	16.49	81	82.5	230	21.0	1, 30, 65
			184T	L1430T	1,564	GO1	16.53	78	84.0	230	20.6	1, 30, 65
			184T	L1430TM	2,063	GO1	16.55	82	80.0	230	24.0	1, 30, 65
			213T	L1508T	2,251	GO1	16.32	108	77.0	230	27.0	
	7 1/2	3600	213T	L1509T	2,806	GO1	18.36	94	82.5	230	30.0	1, 30, 65
		1800	215T	L1510T	2,442	GO1	17.45	134	85.5	230	33.0	30, 65
10	3600	215T	L1511T	3,539	GO1	17.45	131	83.0	230	46.0	1, 30	
	1800	215T	L1512T	3,563	GO1	17.45	132	85.5	230	39.0	65	

General Purpose, single phase, ODP, C-face foot mounted



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
115/230 volt											
1/3	1800	56C	CEL11301	779	GO1	10.74	27	72.4	115/230	1.7	15
1/2	3600	56C	CEL11303	812	GO1	10.74	24	72.4	115/230	2.5	15
	1800	56C	CEL11304	868	GO1	11.62	32	76.2	115/230	2.4	15
3/4	1800	56C	CEL11307	1,024	GO1	12.06	39	82.5	115/230	3.1	15
1	1800	56C	CEL11310	1,172	GO1	12.06	44	82.6	115/230	4.4	15

General Purpose, single phase, ODP, C-face footless

- ODP motors retain IP rating when mounted in horizontal position only.



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
115/230 volt											
1/6	1800	56C	KL1200	530	GO1	11.22	19	49.0	115/230	1.9	30
1/4	1800	56C	KEL11203	728	GO1	11.85	22	68.5	115/230	1.3	15
1/3	3600	56C	KEL11205	766	GO1	11.85	24	70.5	115/208-230	1.5	15
		56C	KEL11205A	810	GO1	12.66	24	70.5	115/230	1.5	15
	1800	56C	VEL11301	779	GO1	11.85	27	72.4	115/230	1.7	15
		56C	VEL11301A	823	GO1	11.00	27	72.4	115/230	1.7	15
1/2	3600	56C	VEL11303	812	GO1	11.85	24	72.4	115/230	2.5	15
		56C	VEL11303A	823	GO1	11.85	24	72.4	115/230	2.5	15
	1800	56C	VEL11304	868	GO1	12.73	32	76.2	115/230	2.4	15
		56C	VEL11304A	912	GO1	12.51	32	76.2	115/230	2.3	15
1200	56C	VEL11305	1,345	GO1	12.12	42	76.2	115/230	2.2	15	
	56C	VEL11306	846	GO1	14.04	39	76.2	115/230	3.3	15	
3/4	3600	56C	VEL11306A	891	GO1	14.04	39	76.2	115/230	3.3	15
		56C	VEL11307	1,024	GO1	13.22	44	82.5	115/230	3.1	15
	1800	56C	VEL11307A	1,069	GO1	12.74	39	81.8	115/230	3.4	15
		56C	VEL11308	1,508	GO1	14.12	47	81.5	115/230	3.2	15
1	3600	56C	VEL11309	985	GO1	13.22	43	82.0	115/230	3.9	15
		56C	VEL11309A	1,029	GO1	12.06	43	82.0	115/230	3.9	15
	1800	56C	VEL11318	1,172	GO1	13.24	44	82.6	115/230	4.4	15
		56C	VEL11318A	1,217	GO1	12.74	44	82.6	115/230	4.2	15
11/2	3600	56C	VEL11313	1,113	GO1	14.10	52	82.0	115/230	5.9	15, 30
		56C	VEL11313A	1,158	GO1	14.10	52	82.0	115/230	5.9	15
	1800	56C	VEL11319	1,386	GO1	15.50	59	83.8	115/230	6.4	15
		145TC	VL1321T	1,311	GO1	15.54	48	75.5	115/230	7.8	30
2	3600	56C	VEL11317	1,223	GO1	15.47	66	82.9	115/230	7.8	15
		56C	VEL11317A	1,268	GO1	15.47	66	82.9	115/230	7.8	15
	1800	145TC	VL1322T	1,335	GO1	14.16	49	75.5	115/208-230	10.2	65
3	3600	182TC	VL1406T	1,622	GO1	15.18	61	75.5	115/230	13.6	30, 65
	1800	184TC	VL1408T	1,642	GO1	16.55	78	78.0	115/230	16.0	30, 65

General Purpose, single phase, 50Hz, ODP, foot mounted

- All motors listed are specifically designed for operation with 50Hz power
- CE Certified and Compliant to EU efficiency regulations



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
110/220 volt, 50HZ											
1/3	3000	48	L1205-50	548	501	9.13	22	64.9	110/220	2.6	
	1500	48	L1206-50	667	501	9.38	24	62.0	110/220	2.3	
1/2	3000	48	L1208-50	603	501	9.75	25	68.0	110/220	3.3	
	1500	48	L1209-50	837	501	10.63	28	62.0	110/220	3.7	
		56	L1304-50	759	501	11.01	29	62.0	110/220	3.7	
3/4	3000	56	L1306-50	734	501	11.01	28	64.0	110/220	5.3	
	1500	56	L1307-50	937	501	12.07	38	66.0	110/220	4.8	
1	3000	56	L1309-50	772	501	11.51	34	66.0	110/220	6.0	
	1500	56	L1318-50	1,143	501	12.94	42	68.0	110/220	5.9	2
1 1/2	3000	56	L1313-50	1,084	501	12.07	43	68.0	110/220	9.2	
	1500	56	L1319-50	1,317	501	12.07	41	64.0	110/220	9.1	2
2	3000	56	L1317-50	1,444	501	12.94	47	70.0	110/220	12.0	2
	1500	182T	L1405T-50	1,531	501	15.00	66	69.0	110/220	14.0	2
3	1500	184T	L1408T-50	1,655	501	16.50	91	75.5	110/220	16.0	
220 volt											
5	1500	213T	L1508T-50	2,589	501	16.32	112	82.5	220	21.6	2

General Purpose, three phase, enclosed 1/8 thru 400 Hp

Features

- 60 Hz designs with 50 Hz information on 2,4,6 pole 1-125 Hp ratings
- Suitable for inverter use per NEMA MG1 Part 31.4.4.2 unless note 38 is indicated
- Simple F1 to F2 conversion on cast iron frames
- Designed for longevity with a 3 year warranty on NEMA Premium® efficient motors

Applications

- Other general purpose applications
- Fans
- Conveyors
- Blowers
- Compressors
- Pumps
- Industrial machines

IP44*

General Purpose, three phase, totally enclosed, foot mounted

*IP54 when Drain Fitting Kit (HA5027A03) is installed in the weep holes (48 thru 256T frame motors only)



Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
200 volt												
1	1800	143T	TEFC	EM3546T-8	1,215	GE3	12.31	35	85.5	200	3.5	1, 68
1 1/2	1800	145T	TEFC	EM3554T-8	1,350	GE3	13.31	43	86.5	200	5.0	1, 68
2	1800	145T	TEFC	EM3558T-8	1,428	GE3	13.29	46	86.5	200	6.7	1, 68
	3600	182T	TEFC	EM3660T-8	1,805	GE3	15.24	82	86.5	200	8.8	1, 68
3	1800	182T	TEFC	EM3611T-8	1,466	GE3	16.55	72	89.5	200	9.7	1, 68
		182T	TEFC	EM3661T-8	1,856	GE3	15.24	96	89.5	200	9.5	1, 68
5	3600	184T	TEFC	EM3663T-8	2,221	GE3	15.24	88	88.5	200	13.3	1, 68
	1800	184T	TEFC	EM3615T-8	1,513	GE3	18.04	93	89.5	200	15.2	1, 68
7 1/2		1800	184T	TEFC	EM3665T-8	1,899	GE3	15.24	108	89.5	200	15.1
	213T		TEFC	EM3769T-8	2,570	GE3	18.45	155	89.5	200	21.0	1, 68
10	1800	213T	TEFC	EM3710T-8	2,183	GE3	19.01	133	91.7	200	21.4	1, 68
		213T	TEFC	EM3770T-8	2,477	GE3	18.45	170	91.7	200	21.4	1, 68
15	1800	215T	TEFC	EM3771T-8	3,013	GE3	18.45	182	90.2	200	26.8	1, 68
		215T	TEFC	EM3714T-8	2,465	GE3	20.51	165	91.7	200	28.6	1, 68
20	1800	215T	TEFC	EM3774T-8	2,778	GE3	18.45	189	91.7	200	28.0	1, 68
		254T	TEFC	EM2394T-8	4,150	GE3	23.36	240	91.0	200	40.0	1, 68
25	1800	254T	TEFC	EM2333T-8	3,797	GE3	23.36	255	92.4	200	42.0	1, 30, 68
		256T	TEFC	EM4106T-8	4,555	GE3	23.36	242	91.0	200	52.0	1, 24, 69
30	1800	256T	TEFC	EM2334T-8	4,604	GE3	23.36	292	93.0	200	55.0	1, 24, 30, 69
		284TS	TEFC	EM4107T-8	5,943	GE3	24.77	281	91.7	200	66.0	1, 24, 69
35	1800	284T	TEFC	EM4103T-8	6,022	GE3	27.76	382	93.6	200	71.0	1, 24, 69
		286TS	TEFC	EM4108T-8	7,061	GE3	24.77	375	91.7	200	76.0	1, 24, 69
40	1800	286T	TEFC	EM4104T-8	7,143	GE3	27.76	413	93.6	200	84.0	1, 24, 69
		326T	TEFC	EM4110T-8	9,342	GE3	30.28	574	94.1	200	111.0	1, 24, 69

Cast iron frame

General Purpose, three phase, totally enclosed, foot mounted

*IP54 when Drain Fitting Kit (HA5027A03) is installed in the weep holes (48 thru 256T frame motors only)

Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
200 volt												
50	1800	326T	TEFC	EM4115T-8	10,208	GE3	30.28	621	94.5	200	131.0	1, 24, 69
230/460 volt												
1/8	1800	42	TEFC	M3353	619	GE3	9.56	16	44.0	230/460	0.5	30, 38
1/6	1800	42	TEFC	M3355	701	GE3	9.56	17	62.0	230/460	0.6	13, 30, 38
	1200	48	TEFC	M3452	723	GE3	10.73	17	57.5	230/460	0.6	13, 30, 38
1/4	1800	48	TEFC	M3454	512	GE3	10.73	19	62.0	230/460	0.6	13, 30, 38
		48	TENV	NM3454	537	GE3	9.62	20	68.0	230/460	0.5	1, 13, 30, 38
	1200	56	TENV	NM3454/35	863	GE3	11.06	28	70.0	230/460	0.8	1, 30, 48
		48	TEFC	M3455	805	GE3	10.73	18	68.0	230/460	0.7	13, 30, 38
		48	TENV	NM3455	741	GE3	9.62	19	68.0	230/460	0.7	30, 38
		56	TEFC	M3531	797	GE3	11.35	23	68.0	230/460	0.7	13, 30, 38
900	56	TEFC	M3532	1,161	GE3	12.23	28	57.5	208-230/460	0.8	13	
3600	48	TENV	M3457	520	GE3	9.62	20	72.0	230/460	0.7	13, 30, 38	
1/3	1800	48	TEFC	M3458	624	GE3	10.72	21	68.0	230/460	0.7	13, 30, 38
		56	TEFC	M3534	560	GE3	11.35	21	68.0	230/460	0.7	13, 30, 38
	1200	56	TENV	NM3534	601	GE3	10.25	23	70.0	230/460	0.7	1, 13, 30, 38
		56	TEFC	M3535	896	GE3	11.35	22	70.0	230/460	0.9	13, 30, 38
		56	TEFC	M3536	1,265	GE3	12.23	29	59.5	208-230/460	1.0	13
		3600	48	TEFC	M3460	603	GE3	10.73	19	72.0	230/460	0.8
1/2	1800	56	TEFC	M3537	603	GE3	11.35	19	72.0	230/460	0.8	12, 30, 38
		48	TEFC	M3461	731	GE3	10.73	22	75.5	230/460	0.8	12, 30, 38
		56	TEFC	EM3538	965	GE3	12.22	29	81.5	230/460	1.0	1, 30
		56	TEFC	M3538	570	GE3	11.35	23	75.5	230/460	0.8	12, 30, 38
	1200	56	TEFC	M3538/35	825	GE3	12.23	25	78.2	208-230/460	0.9	1, 48
		56	TENV	NM3538	697	GE3	10.88	25	75.5	230/460	0.9	1, 12, 30, 38
		56	TENV	NM3538/35	841	GE3	11.06	27	78.2	230/460	0.9	1, 30, 48
		56	TEFC	M3539	965	GE3	11.35	24	72.0	230/460	1.2	30, 38
900	56H	TEFC	M3560	1,419	GE3	12.91	38	70.0	208-230/460	1.3	36	
3/4	3600	48	TEFC	M3463	664	GE3	10.73	21	74.0	230/460	1.3	12, 30, 38
		56	TEFC	M3541	664	GE3	11.35	21	74.0	230/460	1.3	12, 30, 38
	1800	48	TEFC	M3464	790	GE3	10.73	25	75.5	208-230/460	1.5	12, 38
		56	TEFC	M3542	685	GE3	11.35	25	75.5	208-230/460	1.5	12, 38
	1200	56	TENV	NM3542	741	GE3	11.06	29	82.5	230/460	1.1	1, 12, 30
		56	TEFC	M3543	985	GE3	12.84	32	77.0	208-230/460	1.5	38
	900	143T	TEFC	M3543T	985	GE3	13.41	33	77.0	208-230/460	1.5	38
	3600	145T	TEFC	M3562T	1,805	GE3	14.17	51	72.0	208-230/460	1.6	1, 30
1	3600	56	TEFC	EM3545	1,056	GE3	12.23	37	77.0	230/460	1.4	1, 12, 30
		56	TEFC	EM3546	1,079	GE3	12.23	35	85.5	230/460	1.6	1, 30
	1800	56	TENV	ENM3546	1,215	GE3	12.06	39	85.5	230/460	1.7	1, 30
		143T	TEFC	EM3546T	1,079	GE3	12.31	35	85.5	230/460	1.6	1, 30
		143T	TEFC	EM3581T	1,503	GE3	12.54	51	85.5	230/460	1.6	1, 30
		143T	TENV	ENM3546T	1,215	GE3	12.12	39	85.5	230/460	1.7	1, 30
	1200	56	TEFC	EM3556	1,393	GE3	13.23	42	82.5	230/460	1.8	1, 30
		145T	TEFC	EM3556T	1,393	GE3	13.31	42	82.5	230/460	1.8	1, 30

Cast iron frame

General Purpose, three phase, totally enclosed, foot mounted

*IP54 when Drain Fitting Kit (HA5027A03) is installed in the weep holes (48 thru 256T frame motors only)

Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt												
1	1200	145T	TEFC	EM3582T	1,685	GE3	12.54	56	82.5	230/460	1.7	1, 30
	900	182T	TEFC	EM3617T	2,294	GE3	16.54	65	75.5	230/460	2.3	1, 30
1 1/2	3600	56	TEFC	EM3550	1,195	GE3	12.23	35	84.0	230/460	1.9	1, 30
		143T	TEFC	EM3550T	1,195	GE3	12.29	36	84.0	230/460	1.9	1, 30
	1800	143T	TEFC	EM3583T	1,591	GE3	12.54	52	84.0	230/460	1.9	1, 30
		56	TEFC	EM3554	1,199	GE3	13.23	40	86.5	230/460	2.3	1, 30
		145T	TEFC	EM3554T	1,199	GE3	13.28	41	86.5	230/460	2.3	1, 30
		145T	TEFC	EM3584T	1,559	GE3	12.54	57	86.5	230/460	2.3	1, 30
	1200	145T	TENV	ENM3554T	1,350	GE3	12.12	50	86.5	230/460	2.3	1, 30
		182T	TEFC	EM3607T	1,629	GE3	16.55	73	87.5	230/460	2.4	1, 30
	900	182T	TEFC	EM3667T	2,004	GE3	15.24	93	87.5	230/460	2.5	1, 30
		184T	TEFC	EM3618T	2,717	GE3	18.04	82	78.5	230/460	3.0	1, 30
2	3600	56	TEFC	EM3555	1,309	GE3	13.23	42	85.5	230/460	2.5	1, 30
		143T	TEFC	EM3555T	1,309	GE3	13.29	43	85.5	230/460	2.5	1, 30
		145T	TEFC	EM3586T	1,670	GE3	12.54	59	85.5	230/460	2.5	1, 30
	1800	56	TEFC	EM3558	1,268	GE3	13.23	46	86.5	230/460	2.8	1, 30
		145T	TEFC	EM3558T	1,268	GE3	13.28	45	86.5	230/460	2.8	1, 30
	1200	145T	TEFC	EM3587T	1,635	GE3	12.54	58	86.5	230/460	2.8	1, 30
		184T	TEFC	EM3614T	1,708	GE3	18.05	93	88.5	230/460	3.5	1, 30
	900	184T	TEFC	EM3664T	2,037	GE3	15.24	108	88.5	230/460	3.2	1, 30
		213T	TEFC	EM3702T	3,440	GE3	17.89	110	84.0	230/460	3.5	1, 30
	3	3600	56H	TEFC	EM3559	1,434	GE3	13.78	50	86.5	230/460	3.6
143T			TEFC	EM3559T	1,434	GE3	14.17	49	86.5	230/460	3.6	1, 30
182T			TEFC	EM3610T	1,452	GE3	15.16	50	86.5	230/460	3.6	1, 30
182T			TEFC	EM3660T	1,805	GE3	15.24	84	86.5	230/460	3.7	1, 30
1800		182	TEFC	EM3611	2,001	DPL	15.67	70	89.5	230/460	4.2	1, 30
		182T	TEFC	EM3611T	1,301	GE3	16.55	73	89.5	230/460	4.2	1, 30
1200		182T	TEFC	EM3661T	1,856	GE3	15.24	97	89.5	230/460	4.1	1, 30
		213T	TEFC	EM3704T	2,221	GE3	19.02	134	89.5	230/460	4.6	1, 30
900		213T	TEFC	EM3764T	2,538	GE3	18.45	173	89.5	230/460	4.5	1, 30
		215T	TEFC	EM3705T	3,759	GE3	19.01	111	86.5	230/460	5.2	1, 30
5	3600	184T	TEFC	EM3613T	1,610	GE3	16.55	75	88.5	230/460	5.8	1, 30
		184T	TEFC	EM3663T	2,221	GE3	15.23	99	88.5	230/460	5.8	1, 30
	1800	184T	TEFC	EM3615T	1,344	GE3	18.05	92	89.5	230/460	6.7	1, 30
		184T	TEFC	EM3665T	1,899	GE3	15.24	107	89.5	230/460	6.6	1, 30
	1200	215T	TEFC	EM3708T	2,510	GE3	20.52	154	89.5	230/460	7.2	1, 30
		215T	TEFC	EM3768T	2,944	GE3	18.45	195	89.5	230/460	7.4	1, 30
900	254T	TEFC	EM2280T	5,982	GE3	23.36	256	86.5	230/460	8.6	1, 30	
7 1/2	3600	184T	TEFC	EM3616T	2,124	GE3	18.05	98	89.5	230/460	8.4	1, 30
		213T	TEFC	EM3709T	2,412	GE3	17.89	116	89.5	230/460	9.0	1, 30
		213T	TEFC	EM3769T	2,570	GE3	18.45	165	89.5	230/460	9.2	1, 30
	1800	213T	TEFC	EM3710T	1,938	GE3	19.02	133	91.7	230/460	9.5	1, 30
		213T	TEFC	EM3770T	2,477	GE3	18.45	170	91.7	230/460	9.5	1, 30
	1200	254T	TEFC	EM2276T	4,197	GE3	23.36	289	91.0	230/460	11.0	1, 30
900	256T	TEFC	EM2401T	6,597	GE3	23.36	294	86.5	230/460	12.1	1, 30	

Cast iron frame

NOTE INDX MDEX ACC DCPA ACPA GBPA LATH BUFF GRDS DCSW DCPM IMD VSAC BRM UH DP FARM HVAC PUMP XP WD SD GP SP4 INFO TOC

General Purpose, three phase, totally enclosed, foot mounted

*IP54 when Drain Fitting Kit (HA5027A03) is installed in the weep holes (48 thru 256T frame motors only)

Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt												
10	3600	215T	TEFC	EM3711T	2,445	GE3	17.89	120	90.2	230/460	11.6	1, 30
		215T	TEFC	EM3771T	3,013	GE3	18.45	182	90.2	230/460	11.7	1, 30
	1800	215T	TEFC	EM3714T	2,188	GE3	20.52	162	91.7	230/460	12.5	1, 30
		215T	TEFC	EM3774T	2,778	GE3	18.45	191	91.7	230/460	12.3	1, 30
	1200	256T	TEFC	EM2332T	4,790	GE3	23.36	290	91.0	230/460	14.1	1, 30
	900	284T	TEFC	EM2402T	7,659	GE3	27.76	400	89.5	230/460	14.6	1, 30
15	3600	215T	TEFC	EM3713T	3,450	GE3	20.52	172	91.0	230/460	17.0	1, 30
		254T	TEFC	EM2394T	4,150	GE3	23.36	241	91.0	230/460	17.5	1, 30
	1800	254T	TEFC	EM2333T	3,371	GE3	23.36	267	92.4	230/460	18.1	1, 30
	1200	284T	TEFC	EM4100T	6,389	GE3	27.76	342	91.7	230/460	21.0	1, 30
	900	286T	TEFC	EM2395T	10,651	GE3	27.76	455	89.5	230/460	23.0	1, 30
20	3600	256T	TEFC	EM4106T	4,555	GE3	23.36	255	91.0	230/460	23.0	1, 30
		256T	TEFC	EM2334T	4,087	GE3	23.36	309	93.0	230/460	24.0	1, 30
	1800	256T	TEFC	EM2334T-12	5,174	GE3	23.36	291	93.0	230/460	24.0	1, 30
	1200	286T	TEFC	EM4102T	8,507	GE3	27.76	420	91.7	230/460	27.0	1, 30
	900	324T	TEFC	EM4112T	12,111	GE3	30.28	534	90.2	230/460	35.0	1, 30
25	3600	256T	TEFC	EM4118T	5,312	GE3	23.36	305	91.7	230/460	29.0	1, 30
		284TS	TEFC	EM4107T	5,943	GE3	24.77	283	91.7	230/460	29.0	1, 30
	1800	284T	TEFC	EM4103T	5,345	GE3	27.76	425	93.6	230/460	31.0	1, 30
		284T	TEFC	EM4103T-12	6,926	GE3	27.63	400	93.6	230/460	31.0	1, 25, 30
	1200	324T	TEFC	EM4111T	9,625	GE3	30.44	493	93.0	230/460	32.0	1, 30
	900	326T	TEFC	EM4116T	14,958	GE3	30.28	578	90.2	230/460	37.0	1, 30
30	3600	286TS	TEFC	EM4108T	7,061	GE3	24.77	347	91.7	230/460	34.0	1, 30
		286T	TEFC	EM4104T	6,340	GE3	27.76	437	93.6	230/460	38.0	1, 30
	1800	286T	TEFC	EM4104T-12	8,047	GE3	27.76	425	93.6	230/460	36.0	1, 25
	1200	326T	TEFC	EM4117T	11,120	GE3	30.28	655	93.0	230/460	39.0	1, 30
	900	364T	TEFC	EM4338T	16,635	GE3	33.44	813	92.4	230/460	39.3	1, 30
40	3600	324TS	TEFC	EM4109T	9,677	GE3	28.94	551	92.4	230/460	45.0	1, 30
		1800	324T	TEFC	EM4110T	8,291	GE3	30.28	570	94.1	230/460	48.0
	324T	TEFC	EM4110T-12	10,743	GE3	30.28	601	94.1	230/460	48.0	1, 25, 30	
	1200	364T	TEFC	EM4308T	13,855	GE3	33.48	899	94.1	230/460	49.8	1, 30
	900	365T	TEFC	EM4348T	20,633	GE3	33.47	875	93.0	230/460	52.0	1, 30
50	3600	326TS	TEFC	EM4114T	10,586	GE3	28.84	586	93.0	230/460	56.0	1, 30
		326T	TEFC	EM4115T	9,058	GE3	30.28	640	94.5	230/460	58.0	1, 30
	1800	326T	TEFC	EM4115T-12	11,609	GE3	30.28	652	94.5	230/460	58.0	1, 25
	326TS	TEFC	EM4115TS	10,208	GE3	28.84	639	94.5	230/460	58.0	1, 30	
	1200	365T	TEFC	EM4312T	16,742	GE3	33.48	840	94.1	230/460	62.0	1, 30
60	3600	404T	TEFC	EM4458T	25,336	GE3	38.20	1216	93.0	230/460	63.0	1, 30
		364TS	TEFC	EM4310T	14,873	GE3	31.36	810	94.5	230/460	65.4	1
	1800	364T	TEFC	EM4314T	13,071	GE3	33.48	912	95.0	230/460	70.0	1, 30
	364T	TEFC	EM4314T-12	16,890	GE3	33.48	850	95.0	230/460	70.0	1, 25	
	364TS	TEFC	EM4314TS	14,687	GE3	31.36	907	95.0	230/460	70.0	1, 30	
	1200	404T	TEFC	EM4403T	20,322	GE3	38.04	1204	95.0	230/460	69.0	1
75	3600	405T	TEFC	EM4468T	29,260	GE3	38.20	1186	93.0	230/460	76.0	1
		365TS	TEFC	EM4313T	17,302	GE3	31.36	1203	93.6	230/460	80.7	1

Cast iron frame

General Purpose, three phase, totally enclosed, foot mounted

*IP54 when Drain Fitting Kit (HA5027A03) is installed in the weep holes (48 thru 256T frame motors only)

Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt												
75	1800	365T	TEFC	EM4316T	15,284	GE3	33.48	901	95.4	230/460	87.0	1, 30
		365T	TEFC	EM4316T-12	19,750	GE3	33.48	955	95.4	230/460	86.0	1, 25
		365TS	TEFC	EM4316TS	17,173	GE3	31.36	946	95.4	230/460	87.0	1
100	1800	405T	TEFC	EM4404T	23,664	GE3	38.04	1229	95.0	230/460	86.9	1
		405T	TEFC	EM4400T	18,927	GE3	38.04	1203	95.4	230/460	112.0	1
		405T	TEFC	EM4400T-12	24,527	GE3	38.04	1211	95.4	230/460	112.0	1, 25
		405TS	TEFC	EM4400TS	21,328	GE3	35.04	1218	95.4	230/460	112.0	1
460 volt												
100	3600	405TS	TEFC	EM4402T-4	22,121	GE3	35.04	1209	95.0	460	110.0	1, 25
	1200	444T	TEFC	EM4409T-4	28,561	GE3	44.75	1828	95.0	460	119.0	1
125	3600	444TS	TEFC	EM4412T-4	27,343	GE3	40.83	1901	95.0	460	137.0	1
		444T	TEFC	EM4410T-4	23,541	GE3	44.75	1882	95.4	460	144.0	1, 25
	1800	444T	TEFC	EM4410TR-4	28,423	GE3	44.75	1988	95.4	460	144.0	1, 5
		444TS	TEFC	EM4410TS-4	26,401	GE3	41.08	2001	95.4	460	144.0	1
150	1200	445T	TEFC	EM4411T-4	33,600	GE3	44.75	2073	95.0	460	146.0	1, 25
		445TS	TEFC	EM4413T-4	32,173	GE3	41.08	1995	95.0	460	164.0	1
	1800	445T	TEFC	EM4406T-4	26,951	GE3	44.75	1998	95.8	460	169.0	1, 25
		445TS	TEFC	EM4406TR-4	32,392	GE3	44.75	1826	95.8	460	169.0	1, 5, 25
200	1200	445TS	TEFC	EM4406TS-4	30,369	GE3	41.08	2071	95.8	460	169.0	1
		447T	TEFC	EM44156T-4	38,486	GE3	48.24	2571	95.8	460	170.0	1, 25
	3600	447TS	TEFC	EM4416T-4	38,558	GE3	44.48	2234	95.4	460	216.0	1
		447T	TEFC	EM4407T-4	38,069	GE3	48.24	2497	96.2	460	222.0	1, 25
250	1800	447T	TEFC	EM4407TR-4	40,091	GE3	48.24	2531	96.2	460	222.0	1, 5
		447TS	TEFC	EM4407TS-4	38,069	GE3	44.48	2376	96.2	460	222.0	1
	1200	449T	TEFC	EM44206T-4	47,483	GE3	53.24	3017	95.8	460	225.0	1
		449TS	TEFC	EM44252T-4	60,041	GE3	49.71	2595	95.8	460	268.0	1
300	1800	449T	TEFC	EM4408T-4	49,922	GE3	53.21	2888	96.2	460	276.0	1, 25
		449T	TEFC	EM4408TR-4	51,944	GE3	53.21	2888	96.2	460	276.0	1, 5
	1200	449TS	TEFC	EM4408TS-4	49,922	GE3	49.46	2888	96.2	460	276.0	1, 25
		449T	TEFC	EM44256T-4	69,422	GE3	53.21	3125	95.8	460	285.0	1, 25
350	3600	449TS	TEFC	EM44302T-4	87,107	GE3	49.47	2593	95.8	460	324.0	1
		449T	TEFC	EM44304T-4	68,590	GE3	53.24	2888	96.2	460	327.0	1
	1800	449TS	TEFC	EM44304TS-4	68,590	GE3	49.47	2763	96.2	460	327.0	1
		L449T	TEFC	EM44306T-4	82,360	GE3	60.21	3626	95.8	460	340.0	1
400	3600	449TS	TEFC	EM44352T-4	104,553	GE3	49.47	2767	95.8	460	377.0	1
		449T	TEFC	EM44354T-4	82,564	GE3	53.24	3027	96.2	460	389.0	1
	1800	449TS	TEFC	EM44354TS-4	82,564	GE3	49.47	3027	96.2	460	389.0	1
575 volt	3600	L449TS	TEFC	EM44402T-4	122,319	GE3	56.72	3649	96.2	460	420.0	
		L449T	TEFC	EM44404T-4	102,800	GE3	60.21	3701	96.2	460	436.0	
1/3	1800	56	TEFC	M3534-5	560	GE3	11.35	20	68.0	575	0.6	1, 13, 38
		56	TEFC	M3537-5	603	GE3	11.35	19	68.0	575	0.8	1, 12, 38
	1200	56	TEFC	M3538-5	641	GE3	11.35	22	74.0	575	0.8	1, 12, 38
		56	TEFC	M3539-5	965	GE3	11.35	23	72.0	575	1.0	1, 12, 38
3/4	3600	56	TEFC	M3541-5	664	GE3	11.35	21	74.0	575	1.0	1, 12, 38

Cast iron frame

TOC
INFO
SP4
GP
SD
WD
XP
PUMP
HVAC
FARM
DP
UH
BRM
VSAC
IMD
DCPM
DCSW
BUFF
LATH
GBPA
ACPA
DCPA
ACC
MDEX
INDX
NOTE

General Purpose, three phase, totally enclosed, foot mounted

*IP54 when Drain Fitting Kit (HA5027A03) is installed in the weep holes (48 thru 256T frame motors only)

Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes	
575 volt													
3/4	1800	56	TEFC	M3542-5	685	GE3	11.35	26	75.5	575	1.2	1, 12, 38	
	1200	56H	TEFC	M3543-5	985	GE3	12.84	33	77.0	575	1.2	38	
		143T	TEFC	M3543T-5	985	GE3	13.41	34	77.0	575	1.2	1, 38	
1	3600	56	TEFC	EM3545-5	1,056	GE3	12.23	27	77.0	575	1.1	12	
	1800	56	TEFC	EM3546-5	1,079	GE3	13.22	38	85.5	575	1.3	1	
		143T	TEFC	EM3546T-5	1,079	GE3	13.28	34	85.5	575	1.3	1	
	1200	56H	TEFC	EM3556-5	1,393	GE3	12.91	41	82.5	575	1.4		
		145T	TEFC	EM3556T-5	1,393	GE3	13.31	40	82.5	575	1.4	1	
	3600	143T	TEFC	EM3550T-5	1,195	GE3	12.29	36	84.0	575	1.5	1	
1 1/2	1800	56	TEFC	EM3554-5	1,199	GE3	13.23	41	86.5	575	1.8	1	
		143T	TEFC	EM3554T-5	1,199	GE3	13.28	42	86.5	575	1.7	1	
	1200	182T	TEFC	EM3607T-5	1,629	GE3	16.55	73	87.5	575	1.9	1	
2	3600	56H	TEFC	EM3555-5	1,309	GE3	12.91	41	85.5	575	2.0		
		143T	TEFC	EM3555T-5	1,309	GE3	13.29	43	85.5	575	2.0	1	
	1800	56H	TEFC	EM3558-5	1,268	GE3	12.91	45	86.5	575	2.2	1	
		145T	TEFC	EM3558T-5	1,268	GE3	13.31	46	86.5	575	2.2	1	
	1200	184T	TEFC	EM3614T-5	1,708	GE3	18.05	90	88.5	575	2.8		
		56H	TEFC	EM3559-5	1,434	GE3	13.78	50	86.5	575	2.9	1	
3	3600	143T	TEFC	EM3559T-5	1,434	GE3	14.17	60	86.5	575	2.9	1	
		182T	TEFC	EM3610T-5	1,452	GE3	15.16	56	86.5	575	2.9	1	
	1800	182T	TEFC	EM3611T-5	1,301	GE3	16.55	73	89.5	575	3.3	1	
		182T	TEFC	EM3661T-5	1,856	GE3	15.24	97	89.5	575	3.3	1	
	1200	213T	TEFC	EM3704T-5	2,221	GE3	19.01	129	89.5	575	3.7	1	
5	3600	184T	TEFC	EM3613T-5	1,610	GE3	16.54	75	88.5	575	4.7	1	
	1800	184T	TEFC	EM3615T-5	1,344	GE3	18.05	89	89.5	575	5.3	1	
		184T	TEFC	EM3665T-5	1,899	GE3	15.24	108	89.5	575	5.3	1	
	1200	215T	TEFC	EM3708T-5	2,510	GE3	20.51	154	89.5	575	5.8	1	
7 1/2	3600	184T	TEFC	EM3616T-5	2,124	GE3	18.05	98	89.5	575	6.8	1	
		213T	TEFC	EM3709T-5	2,412	GE3	17.89	115	89.5	575	7.0	1	
	1800	213T	TEFC	EM3710T-5	1,938	GE3	19.02	123	91.7	575	7.6	1	
		213T	TEFC	EM3770T-5	2,477	GE3	18.45	170	91.7	575	7.5	1	
10	3600	215T	TEFC	EM3711T-5	2,445	GE3	17.89	119	90.2	575	9.5	1	
	1800	215T	TEFC	EM3714T-5	2,188	GE3	20.52	165	91.7	575	9.8	1	
		215T	TEFC	EM3774T-5	2,778	GE3	18.45	185	91.7	575	9.8	1	
15	3600	215T	TEFC	EM3713T-5	3,450	GE3	20.52	169	91.0	575	13.6	1	
		254T	TEFC	EM2394T-5	4,150	GE3	23.36	245	91.0	575	14.1	1	
20	1800	254T	TEFC	EM2333T-5	3,371	GE3	23.36	258	92.4	575	14.6	1	
	3600	256T	TEFC	EM4106T-5	4,555	GE3	23.36	252	91.0	575	18.0	1	
25	3600	1800	256T	TEFC	EM2334T-5	4,087	GE3	23.36	290	93.0	575	19.2	1
		284TS	TEFC	EM4107T-5	5,943	GE3	24.77	335	91.7	575	23.0	1	
30	3600	1800	284T	TEFC	EM4103T-5	5,345	GE3	27.76	380	93.6	575	24.0	1
		286TS	TEFC	EM4108T-5	7,061	GE3	24.77	331	91.7	575	28.0	1	
40	3600	1800	286T	TEFC	EM4104T-5	6,340	GE3	27.76	408	93.6	575	29.0	1
		324TS	TEFC	EM4109T-5	9,677	GE3	28.84	522	92.4	575	37.0	1	
	1800	324T	TEFC	EM4110T-5	8,291	GE3	30.28	566	94.1	575	39.0	1	

Cast iron frame

General Purpose, three phase, totally enclosed, foot mounted

*IP54 when Drain Fitting Kit (HA5027A03) is installed in the weep holes (48 thru 256T frame motors only)

Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
575 volt												
50	3600	326TS	TEFC	EM4114T-5	10,586	GE3	28.84	574	93.0	575	45.0	1
	1800	326T	TEFC	EM4115T-5	9,058	GE3	30.28	623	94.5	575	46.0	1
60	1800	364T	TEFC	EM4314T-5	13,071	GE3	33.48	919	95.0	575	55.0	1
75	1800	365T	TEFC	EM4316T-5	15,284	GE3	33.48	907	95.4	575	69.0	1
100	1800	405T	TEFC	EM4400T-5	18,927	GE3	38.04	1208	95.4	575	89.6	1
125	1800	444T	TEFC	EM4410T-5	23,429	GE3	44.75	1669	95.4	575	115.0	1
150	1800	445T	TEFC	EM4406T-5	26,951	GE3	44.75	2151	95.8	575	135.0	1

Cast iron frame

General Purpose, three phase, totally enclosed, C-face foot mounted

*IP54 when Drain Fitting Kit (HA5027A03) is installed in the weep holes (48 thru 256T frame motors only)



Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
200 volt												
1/2	1800	56C	TEFC	CM3538-8	779	GE3	11.35	23	74.0	200	2.2	12, 38
1	1800	56C	TEFC	CEM3546-8	1,261	GE3	12.23	38	85.5	200	3.5	1
230/460 volt												
1/4	1800	56C	TENV	CNM3454/35	863	GE3	11.06	31	70.0	230/460	0.8	1, 30, 48
	1200	56C	TENV	CNM3531	1,097	GE3	11.06	31	68.0	208-230/460	0.5	13
1/3	3600	56C	TENV	CNM3457	634	GE3	10.25	21	72.0	208-230/460	0.7	30, 38
	1800	56C	TEFC	CM3534	620	GE3	11.35	21	68.0	230/460	0.7	13, 30, 38
1/2	3600	56C	TEFC	CM3537	645	GE3	11.35	20	72.0	230/460	0.8	12, 30, 38
	1800	56C	TEFC	CM3538	611	GE3	11.35	23	75.5	230/460	0.8	12, 30, 38
		56C	TENV	CNM3538/35	883	GE3	11.06	28	78.2	230/460	0.9	1, 30, 48
	1200	56C	TEFC	CM3539	1,008	GE3	11.35	23	72.0	230/460	1.2	12, 30, 38
3/4	3600	56C	TENV	CNM3539	1,077	GE3	12.06	40	78.5	230/460	1.0	30
		56C	TEFC	CM3541	705	GE3	11.35	22	74.0	230/460	1.3	12, 30, 38
		56C	TEFC	CM3542	726	GE3	11.35	26	75.5	208-230/460	1.5	12, 38
	1800	56C	TENV	CNM3542	792	GE3	11.06	31	82.5	230/460	1.1	30
		56C	TEFC	CM3543	1,028	GE3	12.85	23	77.0	208-230/460	1.5	30, 38
		56C	TEFC	CEM3545	1,102	GE3	12.22	33	77.0	230/460	1.4	1, 12, 30
1	3600	56C	TEFC	CEM3546	1,261	GE3	12.23	36	85.5	230/460	1.6	1, 30
		56C	TENV	CENM3546	1,261	GE3	12.06	38	85.5	230/460	1.7	30
		143TC	TEFC	CEM3546T	1,135	GE3	13.29	36	85.5	230/460	1.6	1, 30
	1800	143TC	TEFC	CEM3581T	1,610	GE3	13.04	54	85.5	230/460	1.6	1, 30
		56C	TEFC	CEM3556	1,439	GE3	13.23	41	82.5	230/460	1.8	30
		143TC	TEFC	CEM3556T	1,456	GE3	13.29	43	82.5	230/460	1.8	1, 30
1 1/2	3600	56C	TEFC	CEM3550	1,242	GE3	12.22	37	84.0	230/460	1.9	1, 30
		143TC	TEFC	CEM3550T	1,258	GE3	13.29	40	84.0	230/460	1.9	1, 30
		143TC	TEFC	CEM3583T	1,698	GE3	13.04	55	84.0	230/460	1.9	1, 30
	1800	56C	TEFC	CEM3554	1,397	GE3	13.23	45	86.5	230/460	2.3	
		145TC	TEFC	CEM3554T	1,255	GE3	13.29	42	86.5	230/460	2.3	1, 30
		145TC	TEFC	CEM3584T	1,666	GE3	13.03	60	86.5	230/460	2.3	1, 30
1200	182TC	TEFC	CEM3607T	1,747	GE3	16.55	77	87.5	230/460	2.4	1, 30	
2	3600	56C	TEFC	CEM3555	1,355	GE3	13.23	46	85.5	230/460	2.5	1, 30
		143TC	TEFC	CEM3555T	1,372	GE3	13.29	44	85.5	230/460	2.5	1, 30
		143TC	TEFC	CEM3586T	1,777	GE3	13.04	60	85.5	208-230/460	2.5	1, 30
	1800	56C	TEFC	CEM3558	1,474	GE3	13.23	46	86.5	230/460	2.8	1, 30
		145TC	TEFC	CEM3558T	1,324	GE3	13.29	46	86.5	230/460	2.8	1, 30
		145TC	TEFC	CEM3587T	1,742	GE3	13.04	62	86.5	230/460	2.8	1, 30
1200	184TC	TEFC	CEM3614T	1,826	GE3	18.05	97	88.5	230/460	3.5	1, 30	
	184TC	TEFC	CEM3664T	2,200	GE3	15.98	115	88.5	230/460	3.2	1, 30	
3	3600	56C	TEFC	CEM3559	1,480	GE3	14.10	50	86.5	230/460	3.6	1, 30
		143TC	TEFC	CEM3559T	1,497	GE3	14.17	52	86.5	230/460	3.6	1, 30
		182TC	TEFC	CEM3610T	1,571	GE3	15.18	50	86.5	230/460	3.6	1, 30

Cast iron frame

General Purpose, three phase, totally enclosed, C-face foot mounted

*IP54 when Drain Fitting Kit (HA5027A03) is installed in the weep holes (48 thru 256T frame motors only)

Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt												
3	3600	182TC	TEFC	CEM3660T	1,968	GE3	15.98	90	86.5	230/460	3.8	1, 30
	1800	182TC	TEFC	CEM3611T	1,406	GE3	16.55	75	89.5	230/460	4.2	1, 30
		182TC	TEFC	CEM3661T	2,019	GE3	15.98	104	89.5	230/460	4.1	1, 30
	1200	213TC	TEFC	CEM3704T	2,450	GE3	19.76	141	89.5	230/460	4.6	1, 30
		213TC	TEFC	CEM3764T	2,860	GE3	19.20	173	89.5	230/460	4.5	1, 30
5	3600	184TC	TEFC	CEM3613T	1,729	GE3	16.55	78	88.5	230/460	5.8	1, 30
		184TC	TEFC	CEM3663T	2,384	GE3	15.98	91	88.5	230/460	5.8	1, 30
	1800	184TC	TEFC	CEM3615T	1,449	GE3	18.05	93	89.5	230/460	6.7	1, 30
		184TC	TEFC	CEM3665T	2,062	GE3	15.98	114	89.5	230/460	6.6	1, 30
	1200	215TC	TEFC	CEM3708T	2,738	GE3	21.26	161	89.5	230/460	7.2	1, 30
		215TC	TEFC	CEM3768T	3,267	GE3	19.20	190	89.5	230/460	7.4	1, 30
7 1/2	3600	184TC	TEFC	CEM3616T	2,243	GE3	18.05	101	89.5	230/460	8.4	1, 30
		213TC	TEFC	CEM3709T	2,641	GE3	18.63	120	89.5	230/460	9.0	1, 30
		213TC	TEFC	CEM3769T	2,893	GE3	19.20	155	89.5	230/460	9.0	1, 30
	1800	213TC	TEFC	CEM3710T	2,142	GE3	19.76	154	91.7	230/460	9.5	1, 30
		213TC	TEFC	CEM3770T	2,799	GE3	19.20	170	91.7	230/460	9.5	1, 30
10	3600	215TC	TEFC	CEM3711T	2,674	GE3	18.63	121	90.2	230/460	11.6	1, 30
		215TC	TEFC	CEM3771T	3,336	GE3	19.20	182	90.2	230/460	11.7	1, 30
	1800	215TC	TEFC	CEM3714T	2,391	GE3	21.26	165	91.7	230/460	12.5	1, 30
		215TC	TEFC	CEM3774T	3,101	GE3	19.20	195	91.7	230/460	12.3	1, 30
15	3600	215TC	TEFC	CEM3713T	3,679	GE3	21.26	182	91.0	230/460	17.0	1, 30
	1800	254TC	TEFC	CEM2394T	5,110	GE3	23.86	250	91.0	230/460	17.5	1, 30
20	1800	254TC	TEFC	CEM2333T	4,222	GE3	23.86	269	92.4	230/460	18.1	1, 30
	3600	256TC	TEFC	CEM4106T	5,515	GE3	23.86	265	91.0	208-230/460	23.0	1, 30
25	1800	256TC	TEFC	CEM2334T	5,564	GE3	23.86	298	93.0	230/460	24.0	1, 30
	3600	284TSC	TEFC	CEM4107T	7,217	GE3	24.77	283	91.7	230/460	29.0	1, 30
30	1800	284TC	TEFC	CEM4103T	7,296	GE3	27.76	430	93.6	230/460	31.0	1, 30
	3600	286TSC	TEFC	CEM4108T	8,335	GE3	26.39	389	91.7	230/460	34.0	1, 30
40	1800	286TC	TEFC	CEM4104T	8,418	GE3	27.76	515	93.6	230/460	38.0	1, 30
	3600	324TSC	TEFC	CEM4109T	11,148	GE3	28.94	600	92.4	230/460	45.0	1, 30
50	1800	324TC	TEFC	CEM4110T	10,812	GE3	30.34	590	94.1	230/460	48.0	1, 30
	3600	326TSC	TEFC	CEM4114T	12,057	GE3	28.78	591	93.0	230/460	56.0	1, 30
60	1800	326TC	TEFC	CEM4115T	11,678	GE3	30.34	585	94.5	230/460	58.0	1, 30
	3600	364TSC	TEFC	CEM4310T	16,472	GE3	31.31	830	94.5	230/460	65.4	1
75	1800	364TC	TEFC	CEM4314T	16,286	GE3	33.44	915	95.0	230/460	70.0	1, 30
	3600	365TSC	TEFC	CEM4313T	18,900	GE3	31.31	905	93.6	230/460	80.7	1
100	1800	365TC	TEFC	CEM4316T	18,772	GE3	33.44	907	95.4	230/460	87.0	1, 30
100	1800	405TC	TEFC	CEM4400T	23,327	GE3	38.19	1360	95.4	230/460	112.0	1
575 volt												
1/3	1800	56C	TEFC	CM3534-5	620	GE3	11.35	21	68.0	575	0.6	13, 38
1/2	1800	56C	TEFC	CM3538-5	611	GE3	11.35	23	74.0	575	0.8	12, 38
3/4	1800	56C	TEFC	CM3542-5	726	GE3	11.35	26	75.5	575	1.2	12, 38
1	1800	56C	TEFC	CEM3546-5	1,261	GE3	13.23	38	85.5	575	1.3	1
		143TC	TEFC	CEM3546T-5	1,135	GE3	13.29	37	85.5	575	1.3	1
		143TC	TEFC	CEM3581T-5	1,610	GE3	13.03	54	85.5	575	1.2	1

Cast iron frame

TOC
INFO
SP4
GP
SD
WD
XP
PUMP
HVAC
FARM
DP
UH
BRM
VSAC
IMD
DCPM
DCSW
GRDS
BUFF
LATH
GBPA
ACPA
DCPA
ACC
MDEX
INDX
NOTE

General Purpose, three phase, totally enclosed, C-face foot mounted

*IP54 when Drain Fitting Kit (HA5027A03) is installed in the weep holes (48 thru 256T frame motors only)

Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
575 volt												
1 1/2	3600	143TC	TEFC	CEM3583T-5	1,698	GE3	13.04	54	84.0	575	1.5	1
	1800	56C	TEFC	CEM3554-5	1,396	GE3	13.23	41	86.5	575	1.8	1
		145TC	TEFC	CEM3554T-5	1,255	GE3	13.29	42	86.5	575	1.7	1
		145TC	TEFC	CEM3584T-5	1,666	GE3	13.03	63	86.5	575	1.7	1
2	3600	143TC	TEFC	CEM3586T-5	1,777	GE3	13.04	60	85.5	575	2.0	1
	1800	56C	TEFC	CEM3558-5	1,474	GE3	13.23	45	86.5	575	2.2	1
		145TC	TEFC	CEM3558T-5	1,324	GE3	13.29	47	86.5	575	2.2	1
		145TC	TEFC	CEM3587T-5	1,742	GE3	13.03	61	86.5	575	2.2	1
3	3600	143TC	TEFC	CEM3559T-5	1,497	GE3	14.17	52	86.5	575	2.9	1
		182TC	TEFC	CEM3610T-5	1,571	GE3	16.53	58	86.5	575	2.9	1
		182TC	TEFC	CEM3660T-5	1,968	GE3	15.98	89	86.5	575	3.0	1
	1800	182TC	TEFC	CEM3611T-5	1,406	GE3	16.55	75	89.5	575	3.3	1
		182TC	TEFC	CEM3661T-5	2,019	GE3	15.98	102	89.5	575	3.3	1
5	3600	184TC	TEFC	CEM3613T-5	1,729	GE3	16.55	78	88.5	575	4.7	1
		184TC	TEFC	CEM3663T-5	2,384	GE3	15.98	95	88.5	575	4.7	1
	1800	184TC	TEFC	CEM3615T-5	1,449	GE3	18.05	93	89.5	575	5.3	1
		184TC	TEFC	CEM3665T-5	2,062	GE3	15.98	113	89.5	575	5.3	1
		3600	213TC	TEFC	CEM3769T-5	2,893	GE3	19.20	179	89.5	575	7.4
7 1/2	1800	213TC	TEFC	CEM3710T-5	2,142	GE3	19.76	129	91.7	575	7.6	1
		213TC	TEFC	CEM3770T-5	2,799	GE3	19.20	170	91.7	575	7.5	1
	3600	215TC	TEFC	CEM3711T-5	2,674	GE3	18.63	123	90.2	575	9.5	1
10	215TC	TEFC	CEM3771T-5	3,336	GE3	19.20	182	90.2	575	9.3	1	
		TEFC	CEM3714T-5	2,391	GE3	21.26	165	91.7	575	9.6	1	
	215TC	TEFC	CEM3774T-5	3,101	GE3	19.20	231	91.7	575	9.8	1	
15	3600	215TC	TEFC	CEM3713T-5	3,679	GE3	21.26	169	91.0	575	13.6	1
	1800	254TC	TEFC	CEM2333T-5	4,222	GE3	23.86	275	92.4	575	14.6	1
20	3600	256TC	TEFC	CEM4106T-5	5,515	GE3	23.86	280	91.0	575	18.0	1
	1800	256TC	TEFC	CEM2334T-5	5,564	GE3	23.86	289	93.0	575	19.2	1
25	1800	284TC	TEFC	CEM4103T-5	7,296	GE3	27.76	401	93.6	575	24.0	1
30	1800	286TC	TEFC	CEM4104T-5	8,418	GE3	27.76	449	93.6	575	31.0	1

Cast iron frame

General Purpose, three phase, totally enclosed, C-face with footless



Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt												
1/4	1800	56C	TEFC	KM3454	542	GE3	11.35	19	62.0	230/460	0.6	12, 30, 38
		56C	TENV	KENM3454	845	GE3	11.06	26	80.0	230/460	0.4	30
		56C	TENV	KNM3454	573	GE3	10.25	18	62.0	208-230/460	0.6	2, 20, 30, 38
1/3	1200	56C	TEFC	VM3531	828	GE3	11.35	20	68.0	230/460	0.7	13, 30, 38
		56C	TENV	KM3457	553	GE3	10.25	20	72.0	230/460	0.7	13, 30, 38
	3600	56C	TENV	KNM345 / 35	891	GE3	11.07	29	78.5	230/460	0.5	
		56C	TENV	KNM3457/35	891	GE3	11.07	29	78.5	230/460	0.5	1, 13, 30, 48
	1800	56C	TEFC	VM3534	586	GE3	11.35	21	68.0	230/460	0.7	13, 30, 38
		56C	TENV	KENM3534	932	GE3	11.06	33	75.5	230/460	0.9	1, 30, 48
56C		TENV	KNM3534	634	GE3	10.25	23	70.0	208-230/460	0.7	2, 30, 38	
1200	56C	TEFC	VM3535	930	GE3	11.35	22	70.0	230/460	0.9	13, 30, 38	
	56C	TENV	KENM3535	1,370	GE3	11.06	35	81.5	230/460	0.6	1, 30, 48	
1/2	3600	56C	TEFC	VM3537	636	GE3	11.35	20	72.0	230/460	0.8	12, 30, 38
		56C	TENV	VNM3537	894	GE3	11.06	32	77.0	230/460	0.8	1, 12, 48
	1800	56C	TEFC	VEM3538	1,016	GE3	12.23	31	78.2	230/460	0.9	1, 12, 30, 48
		56C	TEFC	VM3538	598	GE3	11.35	23	75.5	208-230/460	0.8	12, 30, 38
		56C	TENV	VENM3538	1,056	GE3	11.06	32	78.2	230/460	0.9	30
	1200	56C	TENV	VNM3538	731	GE3	10.25	22	75.5	208-230/460	0.8	2, 20, 30, 38
56C		TEFC	VM3539	998	GE3	11.35	24	72.0	230/460	1.2	12, 30, 38	
3/4	3600	56C	TEFC	VM3541	695	GE3	11.35	21	74.0	230/460	1.3	12, 30, 38
		56C	TENV	VNM3541	955	GE3	11.06	36	84.0	208-230/460	1.0	12, 30, 48
	1800	56C	TEFC	VEM3542	1,079	GE3	12.23	35	82.5	208-230/460	1.1	1, 12, 30
		56C	TEFC	VM3542	711	GE3	11.35	26	75.5	208-230/460	1.5	12, 30, 38
		56C	TENV	VENM3542	1,153	GE3	11.06	33	82.5	230/460	1.1	1, 30, 48
	1200	56C	TENV	VNM3542	749	GE3	11.75	31	75.0	230/460	1.3	12, 30, 38
56C		TEFC	VM3543	1,021	GE3	12.85	32	77.0	208-230/460	1.5	30, 38	
1	3600	143TC	TEFC	VM3543T	1,021	GE3	13.41	33	77.0	208-230/460	1.5	30, 38
		56C	TEFC	VEM3545	1,102	GE3	12.23	32	77.0	230/460	1.4	1, 12, 30
	1800	56C	TEFC	VEM3546	1,120	GE3	12.23	36	85.5	230/460	1.6	1, 30
		56C	TEFC	VEM3581	1,610	GE3	12.47	52	85.5	230/460	1.6	1, 30
		56C	TENV	VENM3546	1,261	GE3	12.06	38	85.5	230/460	1.7	1, 30
	143TC	TEFC	VEM3546T	1,135	GE3	12.29	36	85.5	230/460	1.6	1, 30	
		TEFC	VEM3581T	1,610	GE3	13.03	54	85.5	230/460	1.6	1, 30	
		TENV	VENM3546T	1,278	GE3	12.12	40	85.5	230/460	1.7	1, 30, 48	
		TENV	VENM3581T	1,610	GE3	11.36	56	85.5	230/460	1.6	1, 30, 48	
	1200	56C	TEFC	VEM3556	1,439	GE3	13.23	43	82.5	230/460	1.8	1, 30
145TC		TEFC	VEM3556T	1,456	GE3	13.29	42	82.5	230/460	1.8	1, 30	
11 1/2	3600	56C	TEFC	VEM3550	1,242	GE3	12.23	35	84.0	208-230/460	1.9	1, 30
		143TC	TEFC	VEM3550T	1,258	GE3	12.29	35	84.0	208-230/460	1.9	30
	1800	56C	TEFC	VEM3554	1,240	GE3	13.23	42	86.5	230/460	2.3	1, 30
145TC		TEFC	VEM3554T	1,255	GE3	13.29	41	86.5	230/460	2.3	1, 30	

Cast iron frame

General Purpose, three phase, totally enclosed, C-face with footless

Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt												
1 1/2	1800	145TC	TEFC	VEM3584T	1,666	GE3	13.03	60	86.5	230/460	2.3	1, 30
	1200	56C	TEFC	VEM3557	1,487	GE3	15.62	72	87.5	230/460	2.4	1, 30
		145TC	TEFC	VEM3557T	1,503	GE3	15.68	72	87.5	230/460	2.4	1, 30
2	3600	56C	TEFC	VEM3555	1,355	GE3	13.23	43	85.5	208-230/460	2.5	1
		143TC	TEFC	VEM3555T	1,372	GE3	12.29	41	85.5	208-230/460	2.5	1
	1800	56C	TEFC	VEM3558	1,309	GE3	13.23	46	86.5	230/460	2.8	1, 30
		145TC	TEFC	VEM3558T	1,324	GE3	13.29	47	86.5	230/460	2.8	1, 30
		145TC	TEFC	VEM3587T	1,742	GE3	13.03	59	86.5	230/460	2.8	1, 30
	1200	184TC	TEFC	VEM3614T	1,826	GE3	18.04	91	88.5	230/460	3.3	1, 30
		184TC	TEFC	VEM3664T	2,200	GE3	15.98	113	88.5	230/460	3.2	1, 30
	3	3600	56C	TEFC	VEM3559	1,480	GE3	14.10	50	86.5	230/460	3.6
145TC			TEFC	VEM3559T	1,497	GE3	14.17	50	86.5	230/460	3.6	1, 30
182TC			TEFC	VEM3610T	1,571	GE3	15.18	50	86.5	230/460	3.6	1, 30
1800		56C	TEFC	VEM3561	1,429	GE3	15.62	70	89.5	230/460	4.2	1, 30
		145TC	TEFC	VEM3561T	1,446	GE3	15.68	70	89.5	230/460	4.2	1, 30
		182TC	TEFC	VEM3611T	1,406	GE3	16.54	73	89.5	230/460	4.2	1, 30
1200	182TC	TEFC	VEM3661T	2,019	GE3	15.98	98	89.5	230/460	4.1	1, 30	
1200	213TC	TEFC	VEM3704T	2,450	GE3	19.75	132	89.5	230/460	4.6	1, 30	
5	3600	184TC	TEFC	VEM3613T	1,729	GE3	16.54	75	88.5	230/460	5.8	1, 30
		184TC	TEFC	VEM3663T	2,384	GE3	15.98	99	88.5	230/460	5.8	1, 30
	1800	184TC	TEFC	VEM3615T	1,449	GE3	18.04	88	89.5	230/460	6.7	1, 30
		184TC	TEFC	VEM3665T	2,062	GE3	15.98	109	89.5	230/460	6.6	1, 30
1200	215TC	TEFC	VEM3708T	2,738	GE3	21.25	149	89.5	230/460	7.2	8, 30	
7 1/2	3600	184TC	TEFC	VEM3616T	2,243	GE3	18.04	96	90.2	230/460	8.8	1, 30
		213TC	TEFC	VEM3709T	2,641	GE3	18.56	96	90.2	230/460	8.8	1, 30
	1800	213TC	TEFC	VEM3710T	2,412	GE3	19.75	129	91.7	230/460	9.5	1, 30
		213TC	TEFC	VEM3770T	2,799	GE3	19.20	170	91.7	230/460	9.5	1, 30
10	3600	215TC	TEFC	VEM3711T	2,674	GE3	18.63	125	90.2	208-230/460	11.9	1, 30
	1800	215TC	TEFC	VEM3714T	2,694	GE3	21.25	165	91.7	230/460	12.5	1, 30
		215TC	TEFC	VEM3774T	3,101	GE3	19.20	197	91.7	230/460	12.3	1, 30
	1200	256TC	TEFC	VEM2332T	5,750	GE3	23.86	315	91.0	230/460	14.1	1, 30
15	3600	215TC	TEFC	VEM3713T	3,679	GE3	21.26	170	91.0	230/460	17.0	1, 30
		254TC	TEFC	VEM2394T	5,110	GE3	20.32	225	91.0	230/460	16.9	1, 30
	1800	254TC	TEFC	VEM2333T	4,757	GE3	23.86	283	92.4	230/460	18.1	1, 30
20	3600	256TC	TEFC	VEM4106T	5,515	GE3	23.86	229	91.0	208-230/460	23.0	1, 30
	1800	256TC	TEFC	VEM2334T	5,564	GE3	23.86	320	93.0	230/460	24.0	1, 30
25	3600	284TSC	TEFC	VEM4107T	7,217	GE3	22.45	323	91.7	230/460	29.0	1, 30
	1800	284TC	TEFC	VEM4103T	7,296	GE3	27.76	449	93.6	230/460	31.0	1, 30
30	3600	286TSC	TEFC	VEM4108T	8,335	GE3	22.45	393	91.7	230/460	34.0	1, 30
	1800	286TC	TEFC	VEM4104T	8,418	GE3	27.76	286	93.6	230/460	38.0	1, 30
575 volt												
1/3	1800	56C	TEFC	VM3534-5	586	GE3	11.35	21	68.0	575	0.6	13, 38
1/2	3600	56C	TEFC	VM3537-5	636	GE3	11.35	19	68.0	575	0.8	12, 38
	1800	56C	TEFC	VEM3538-5	1,016	GE3	12.23	32	80.0	575	0.8	12
		56C	TEFC	VEM3538-5	598	GE3	11.35	22	74.0	575	0.8	12, 38
3/4	3600	56C	TEFC	VM3541-5	695	GE3	11.35	21	74.0	575	1.0	12, 38
	1800	56C	TEFC	VEM3542-5	1,079	GE3	12.23	33	82.5	575	0.9	12

Cast iron frame

General Purpose, three phase, totally enclosed, C-face with footless

Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
575 volt												
3/4	1800	56C	TEFC	VM3542-5	711	GE3	11.35	26	75.5	575	1.2	12, 38
	3600	56C	TEFC	VEM3545-5	1,102	GE3	12.23	27	77.0	575	1.1	1, 12
	1800	56C	TEFC	VEM3546-5	1,120	GE3	13.22	35	85.5	575	1.3	1
		143TC	TEFC	VEM3546T-5	1,135	GE3	13.29	36	85.5	575	1.3	1
		143TC	TEFC	VEM3581T-5	1,610	GE3	13.03	53	85.5	575	1.2	1
1 1/2	3600	56C	TEFC	VEM3550-5	1,242	GE3	12.23	38	84.0	575	1.5	1
		143TC	TEFC	VEM3550T-5	1,258	GE3	12.29	35	84.0	575	1.5	1
	1800	56C	TEFC	VEM3554-5	1,240	GE3	14.10	50	88.5	575	1.7	1
		145TC	TEFC	VEM3554T-5	1,255	GE3	13.29	41	86.5	575	1.8	1
		145TC	TEFC	VEM3584T-5	1,666	GE3	13.03	58	86.5	575	1.7	1
2	3600	56C	TEFC	VEM3555-5	1,355	GE3	13.23	41	85.5	575	2.0	1
		56C	TEFC	VEM3558-5	1,309	GE3	13.23	45	86.5	575	2.2	1
	1800	145TC	TEFC	VEM3558T-5	1,324	GE3	13.29	46	86.5	575	2.2	1
		145TC	TEFC	VEM3587T-5	1,742	GE3	13.03	60	86.5	575	2.2	1
3	3600	56C	TEFC	VEM3559-5	1,480	GE3	14.10	50	86.5	575	2.9	1
		182TC	TEFC	VEM3610T-5	1,571	GE3	15.18	53	86.5	575	2.9	1
	1800	182TC	TEFC	VEM3611T-5	1,406	GE3	16.54	71	89.5	575	3.3	1
5	1800	182TC	TEFC	VEM3661T-5	2,019	GE3	15.98	98	89.5	575	3.3	1
		184TC	TEFC	VEM3613T-5	1,729	GE3	16.54	74	88.5	575	4.7	1
		184TC	TEFC	VEM3615T-5	1,449	GE3	18.04	88	89.5	575	5.3	1
7 1/2	1800	184TC	TEFC	VEM3665T-5	2,062	GE3	15.98	110	89.5	575	5.3	1
		213TC	TEFC	VEM3709T-5	2,641	GE3	19.28	101	89.5	575	6.8	1
		213TC	TEFC	VEM3710T-5	2,412	GE3	19.76	123	91.7	575	7.6	1
10	1800	213TC	TEFC	VEM3770T-5	2,799	GE3	19.20	170	91.7	575	7.5	1
		215TC	TEFC	VEM3711T-5	2,674	GE3	18.63	118	90.2	575	9.5	1
		215TC	TEFC	VEM3714T-5	2,694	GE3	21.26	165	91.7	575	9.6	1
15	1800	215TC	TEFC	VEM3774T-5	3,101	GE3	19.20	231	91.7	575	9.8	1
		215TC	TEFC	VEM3713T-5	3,679	GE3	21.26	169	91.0	575	13.6	1
		254TC	TEFC	VEM2333T-5	4,757	GE3	23.86	266	92.4	575	14.6	1
20	1800	256TC	TEFC	VEM2334T-5	5,564	GE3	23.86	314	93.0	575	19.2	1

Cast iron frame

TOC INFO SP4 GP SD WD XP PUMP HVAC FARM DP UH BRM VSAC IMD DCPM DCSW DCPM DCSW GRDS DCSW LATH GBPA ACPPA ACC MDEX INDX NOTE

General Purpose, three phase, TEFC, foot mounted F2


Hp	RPM	Frame	Encl.	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt												
1	1800	143T	TEFC	EFM3546T	1,215	GE3	13.29	35	85.5	230/460	1.6	1, 30
1 1/2	1800	145T	TEFC	EFM3554T	1,350	GE3	13.31	42	86.5	230/460	2.3	1, 30
2	1800	145T	TEFC	EFM3558T	1,428	GE3	13.29	41	86.5	230/460	2.8	1, 30
3	3600	182T	TEFC	EFM3610T	1,452	GE3	15.16	73	86.5	230/460	3.6	1, 30
	1800	182T	TEFC	EFM3611T	1,466	GE3	16.54	73	89.5	230/460	4.2	1, 30
5	3600	184T	TEFC	EFM3613T	1,610	GE3	16.54	75	88.5	230/460	5.9	1, 30
	1800	184T	TEFC	EFM3615T	1,513	GE3	18.04	91	89.5	230/460	6.7	1, 30
7 1/2	3600	213T	TEFC	EFM3709T	2,412	GE3	17.91	115	89.5	230/460	9.0	1, 30
	1800	213T	TEFC	EFM3710T	2,183	GE3	19.01	128	91.7	230/460	9.5	1, 30
10	3600	215T	TEFC	EFM3711T	2,445	GE3	17.91	119	90.2	230/460	11.6	1, 30
	1800	215T	TEFC	EFM3714T	2,465	GE3	20.51	165	91.7	230/460	12.5	1, 30
15	3600	254T	TEFC	EFM2394T	4,150	GE3	23.36	236	91.0	230/460	17.5	1, 30
	1800	254T	TEFC	EFM2333T	3,797	GE3	23.36	256	92.4	230/460	18.1	1, 30
	1200	284T	TEFC	EFM4100T	6,389	GE3	27.81	372	91.7	230/460	21.0	1, 30
20	1800	256T	TEFC	EFM2334T	4,604	GE3	23.36	356	93.0	230/460	24.0	1, 30
	1200	286T	TEFC	EFM4102T	8,507	GE3	27.81	437	91.7	230/460	27.0	1, 30
25	1800	284T	TEFC	EFM4103T	6,022	GE3	27.81	452	93.6	230/460	31.0	1, 30
30	1800	286T	TEFC	EFM4104T	7,143	GE3	27.81	408	93.6	230/460	36.0	1, 30
40	1800	324T	TEFC	EFM4110T	9,342	GE3	30.28	572	94.1	230/460	48.0	1, 30
	1200	364T	TEFC	EFM4308T	13,855	GE3	33.48	855	94.1	230/460	49.8	1, 30
50	3600	326TS	TEFC	EFM4114T	10,586	GE3	28.84	582	93.0	230/460	56.0	1, 30
	1800	326T	TEFC	EFM4115T	10,208	GE3	30.28	640	94.5	230/460	58.0	1, 30
	1200	365T	TEFC	EFM4312T	16,742	GE3	33.49	878	94.1	230/460	62.0	1, 30
60	1800	364T	TEFC	EFM4314T	14,687	GE3	33.44	901	95.0	230/460	70.0	1, 30
	1200	404T	TEFC	EFM4403T	20,322	GE3	38.04	1322	95.0	230/460	69.0	1, 30
75	1800	365T	TEFC	EFM4316T	17,173	GE3	33.44	935	95.4	230/460	87.0	1, 30
	1200	405T	TEFC	EFM4404T	23,664	GE3	38.04	1212	95.0	230/460	86.9	1, 30
100	1800	405T	TEFC	EFM4400T	18,927	GE3	38.18	1235	95.4	230/460	112.0	1, 30
460 volt												
100	1200	444T	TEFC	EFM4409T-4	28,561	GE3	44.75	1625	95.0	460	119.0	1

Cast iron frame

General Purpose, three phase, 50Hz, TEFC, foot mounted

- All motors listed are specifically designed for operation with 50Hz power
- CE Certified and Compliant to EU efficiency regulations



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/400 volt, 50Hz											
1/2	1500	56	M3538-57	734	5E3	11.35	26	73.0	230/400	1.0	
3/4	3000	56C	M3541-57	734	5E3	11.35	25	75.5	230/400	1.4	
	1500	56	M3542-57	785	5E3	12.85	32	75.5	230/400	1.8	
1	3000	56	EM3545-57	1,029	5E3	12.23	35	82.5	230/400	1.6	12
	1500	143T	EM3546T-57	1,052	5E3	12.31	34	82.5	230/400	1.8	1
1 1/2	3000	143T	EM3550T-57	1,194	5E3	13.29	43	85.5	230/400	2.3	
	1500	145T	EM3554T-57	1,070	5E3	13.31	41	84.2	230/400	2.9	1
2	3000	143T	EM3555T-57	1,311	5E3	14.17	50	84.2	230/400	2.9	
	1500	145T	EM3558T-57	1,130	5E3	13.31	45	85.3	230/400	3.4	1
3	3000	182T	EM3610T-57	1,671	5E3	15.16	55	85.9	230/400	4.2	1
	1500	182T	EM3611T-57	1,326	5E3	16.54	70	86.7	230/400	5.6	1
5	3000	184T	EM3613T-57	1,922	5E3	18.04	93	88.1	230/400	6.4	
	1500	184T	EM3615T-57	1,531	5E3	18.04	101	88.4	230/400	8.0	1
400 volt, 50Hz											
7 1/2	3000	213T	EM3709T-58	2,666	5E3	17.89	121	89.2	400	10.4	1
	1500	213T	EM3710T-58	2,124	5E3	19.01	127	89.6	400	10.8	1
10	3000	215T	EM3711T-58	2,827	5E3	19.01	140	90.2	400	13.1	1
	1500	215T	EM3714T-58	2,687	5E3	20.51	165	90.4	400	14.3	1
15	1500	254T	EM2333T-58	4,140	5E3	23.55	291	91.4	400	21.0	1
20	1500	256T	EM2334T-58	5,019	5E3	23.55	304	92.1	400	28.0	
25	1500	284T	EM4103T-58	6,565	5E3	27.76	437	92.6	400	37.0	
30	1500	286T	EM4104T-58	7,787	5E3	27.76	541	93.0	400	43.0	1
40	1500	324T	EM4110T-58	10,183	5E3	30.28	650	93.6	400	52.0	1
50	1500	326T	EM4115T-58	11,127	5E3	30.28	460	93.9	400	67.0	1
60	1500	364T	EM4314T-58	16,009	5E3	33.48	926	94.2	400	79.1	1

Cast iron frame

General Purpose, three phase, 50Hz, TEFC, C-face footless

All motors listed are specifically designed for operation with 50Hz power
CE Certified and Compliant to EU efficiency regulations



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Full Load Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/400 volt, 50Hz											
1/4	1500	56C	KM3454-57	594	5E3	11.35	20	64.0	230/400	0.7	
1/3	1500	56C	VM3534-57	672	5E3	11.35	21	74.0	230/400	0.7	
1/2	3000	56C	VM3537-57	729	5E3	11.35	22	72.0	230/400	1.1	
	1500	56C	VM3538-57	785	5E3	11.35	25	73.0	230/400	1.0	
3/4	3000	56C	VM3541-57	761	5E3	11.35	26	75.5	230/400	1.4	
	1500	56C	VM3542-57	843	5E3	12.85	32	75.5	230/400	1.8	
1	3000	56C	VEM3545-57	1,039	5E3	12.23	35	82.5	230/400	1.6	12
	1500	56C	VEM3546-57	1,029	5E3	12.23	34	82.5	230/400	1.8	1
		143TC	VEM3546T-57	1,029	5E3	12.29	34	82.5	230/400	1.8	1
1 1/2	3000	143TC	VEM3550T-57	1,130	5E3	13.29	43	85.5	230/400	2.3	
	1500	145TC	VEM3554T-57	1,069	5E3	13.29	41	84.2	230/400	2.9	1
2	3000	56C	VEM3555-57	1,121	5E3	14.10	50	84.2	230/400	2.9	
		145TC	VEM3555T-57	1,233	5E3	14.17	50	84.2	230/400	2.9	
	1500	145TC	VEM3558T-57	1,133	5E3	13.29	45	85.3	230/400	3.4	1

General Purpose, three phase, open 1/4 thru 450 Hp

Features

- 60 Hz designs with 50 Hz information on 2,4,6 pole 1-125 Hp ratings
- Suitable for inverter use per NEMA MG1 Part 31.4.4.2 unless note 38 is indicated
- Designed for longevity with a 3 year warranty on premium efficient Super-E® motors
- Optimized airflow design providing higher horsepower in a smaller package

Applications

- Other general purpose applications
- Fans
- Conveyors
- Blowers
- Compressors
- Pumps
- Industrial machines

IP22

General Purpose, three phase, ODP, foot mounted



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
200 volt											
1	1800	143T	EM3116T-8	1,171	GO3	11.12	34	85.5	200	3.5	1, 68
1 1/2	1800	145T	EM3154T-8	1,223	GO3	11.62	37	86.5	200	5.1	1, 68
2	1800	143T	EM3157T-8	1,311	GO3	12.12	40	86.5	200	6.0	1, 68
3	3600	145T	EM3158T-8	1,197	GO3	13.00	51	85.5	200	8.5	1, 68
	1800	182T	EM3211T-8	1,413	GO3	14.99	71	89.5	200	9.7	1, 68
5	3600	182T	EM3212T-8	1,307	GO3	13.62	69	86.5	200	13.8	1, 68
	1800	184T	EM3218T-8	1,548	GO3	16.50	84	89.5	200	15.2	1, 68
7 1/2	3600	184T	EM3219T-8	2,073	GO3	15.00	77	88.5	200	20.0	1, 68
	1800	213T	EM3311T-8	2,274	GO3	16.32	114	91.0	200	23.3	1, 68
10	3600	213T	EM3312T-8	2,371	GO3	16.32	121	89.5	200	27.3	1, 68
	1800	215T	EM3313T-8	2,753	GO3	17.45	129	91.7	200	29.5	1, 68
15	3600	215T	EM3314T-8	3,367	GO3	16.32	131	90.2	200	39.7	1, 68
	1800	254T	EM2513T-8	3,898	GO3	23.19	238	93.0	200	41.0	1, 68
20	3600	254T	EM2514T-8	3,955	GO3	21.69	190	91.0	200	53.0	1, 24, 69
	1800	256T	EM2515T-8	4,276	GO3	23.19	241	93.0	200	55.0	1, 24, 69
25	3600	256T	EM2516T-8	4,749	GO3	21.69	220	91.7	200	65.0	1, 24, 69
	1800	284T	EM2531T-8	5,213	GO3	25.06	333	93.6	200	70.0	1, 24, 69
30	3600	284TS	EM2534T-8	5,605	GO3	22.44	320	91.7	200	80.0	1, 24, 69
	1800	286T	EM2535T-8	5,701	GO3	26.06	278	94.1	200	83.0	1, 24, 69
40	3600	286TS	EM2538T-8	7,221	GO3	22.44	323	92.4	200	105.0	1, 24, 69
	1800	324T	EM2539T-8	7,436	GO3	27.19	434	94.1	200	109.0	1, 24, 69
50	3600	324TS	EM2542T-8	7,864	GO3	25.69	390	93.0	200	129.0	1, 24, 69
	1800	326T	EM2543T-8	8,205	GO3	27.69	630	94.5	200	132.0	1, 24, 69
60	1800	364T	EM2547T-8	10,331	GO3	30.69	623	95.0	200	160.0	1, 24, 69

Cast iron frame

General Purpose, three phase, ODP, foot mounted

Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes	
200 volt												
75	1800	365T	EM2551T-8	12,681	GO3	29.70	783	95.0	200	199.0	1, 24, 69	
230/460 volt												
1/4	1800	48	EM30003	703	GO3	9.62	21	69.5	230/460	0.5	13, 15, 30, 38	
	1200	48	EM30004	777	GO3	9.13	24	67.5	230/460	0.7	13, 15, 30, 38	
1/3	3600	56	EM31101	777	GO3	10.25	24	67.5	230/460	0.7	13, 15, 30, 38	
	1800	48	EM30006	738	GO3	9.62	22	69.5	230/460	0.6	13, 15, 30, 38	
		56	EM30007	743	GO3	9.13	24	73.4	230/460	0.7	13, 15, 30, 38	
	1200	48	EM31104	743	GO3	10.25	24	73.4	230/460	0.7	13, 15, 30, 38	
		56	EM30008	813	GO3	9.75	27	71.4	230/460	0.9	13, 15, 30, 38	
	56	EM31105	813	GO3	10.88	27	71.4	230/460	0.9	13, 15, 30, 38		
1/2	3600	48	EM30009	794	GO3	9.62	24	73.4	230/460	0.8	12, 15, 30, 38	
		56	EM31107	794	GO3	10.25	24	73.4	230/460	0.8	12, 15, 30, 38	
	1800	48	EM30010	818	GO3	11.12	31	78.2	230/460	0.8	12, 15, 30, 38	
		56	EM31108	818	GO3	11.75	31	78.2	230/460	0.8	12, 15, 30, 38	
	1200	56	EM31108A	929	GO3	11.75	31	78.2	230/460	0.8	12, 15, 30, 38	
		48	EM30011	894	GO3	10.63	34	75.3	230/460	1.0	12, 15, 30, 38	
	900	56	EM31109	894	GO3	11.75	34	75.3	230/460	1.0	12, 15, 30, 38	
		56	M3160	1,359	GO3	12.07	38	70.0	230/460	1.3		
3/4	3600	48	EM30012	790	GO3	9.13	22	76.8	230/460	1.2	12, 15, 30, 38	
		56	EM31111	790	GO3	10.25	24	76.8	230/460	1.2	12, 15, 30, 38	
	1800	56	EM31112	901	GO3	11.07	32	82.5	230/460	1.1	12, 15, 30	
		56	EM31112A	1,011	GO3	11.07	32	81.1	208-230/460	1.0	12, 15	
	1200	56	EM31153	1,100	GO3	12.07	39	81.7	230/460	1.3	1, 15, 30	
1	3600	143T	M3153T	965	GO3	12.32	33	77.0	230/460	1.5	30, 38	
		56	EM31115	810	GO3	10.88	27	77.0	230/460	1.6	12, 15, 30, 38	
	1800	56	EM31116	948	GO3	11.07	29	85.5	230/460	1.6	1, 15, 30	
		56	EM31116A	993	GO3	11.07	29	85.5	230/460	1.5	1, 15, 30	
	1200	143T	EM3116T	1,039	GO3	11.13	34	85.5	230/460	1.6	1, 30	
		56H	EM31156	1,386	GO3	11.75	41	82.5	230/460	1.8	1, 15, 30	
	900	145T	EM3156T	1,197	GO3	11.63	36	82.5	230/460	1.8	1, 30	
		182T	EM3216T	1,963	GO3	15.00	65	75.5	230/460	2.1	1, 30	
	1 1/2	3600	56	EM31120	837	GO3	11.07	34	84.0	230/460	2.0	1, 15, 30
			143T	EM3120T	1,008	GO3	11.12	33	84.0	230/460	2.0	1, 30
1800		56	EM31154	1,039	GO3	12.07	36	86.5	230/460	2.3	1, 15, 30	
		56	EM31154A	1,149	GO3	12.07	41	86.5	230/460	2.2	1, 15, 30	
1200		145T	EM3154T	1,087	GO3	11.62	37	86.5	230/460	2.3	1, 30	
		56H	EM31159	1,334	GO3	14.00	54	84.0	230/460	2.6	1, 15, 30	
900		182T	EM3207T	1,401	GO3	15.00	66	86.5	230/460	2.5	1, 30	
		184T	EM3220T	2,384	GO3	16.50	82	77.0	230/460	3.0	1, 30	
2	3600	56	EM31155	942	GO3	12.07	43	85.5	230/460	2.6	1, 15, 30	
		145T	EM3155T	1,182	GO3	11.63	41	85.5	230/460	2.5	1, 30	
	1800	56H	EM31157	1,090	GO3	11.75	45	86.5	230/460	2.8	1, 15, 30	
		145T	EM3157T	1,164	GO3	12.12	40	86.5	230/460	2.8	1, 30	
	1200	145T	EM3157TA	1,442	GO3	12.13	44	86.5	230/460	2.9	1, 30	
		184T	EM3215T	1,433	GO3	16.50	79	87.5	230/460	3.4	1, 30	
	900	213T	EM3303T	2,944	GO3	17.45	111	86.5	208-230/460	3.5	1, 30	
3	3600	56H	EM31158	1,056	GO3	11.75	50	85.5	230/460	3.8	1, 15, 30	

Cast iron frame

General Purpose, three phase, ODP, foot mounted

Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt											
3	3600	145T	EM3158T	1,197	GO3	13.00	46	85.5	230/460	3.8	1, 30
	1800	182T	EM3211T	1,255	GO3	15.00	69	89.5	230/460	4.2	1, 30
		182T	EM3211TA	1,545	GO3	15.00	65	89.5	230/460	4.4	1, 30
5	1200	213T	EM3305T	1,823	GO3	16.32	119	88.5	230/460	4.5	1, 30
	3600	182T	EM3212T	1,307	GO3	13.62	61	86.5	230/460	5.9	1, 30
		184T	EM3218T	1,375	GO3	16.50	84	89.5	230/460	6.6	1, 30
		184T	EM3218TA	1,680	GO3	17.17	84	89.5	230/460	6.6	1, 30
	1200	215T	EM3309T	2,389	GO3	17.45	139	89.5	230/460	7.4	1, 30
	900	254T	EM2504T	4,741	GO3	23.19	240	88.5	230/460	7.6	1, 30
7 1/2	3600	184T	EM3219T	2,073	GO3	15.00	74	88.5	230/460	8.7	1, 30
	1800	213T	EM3311T	2,019	GO3	16.32	115	91.0	230/460	9.8	1, 30
	1200	254T	EM2506T	2,864	GO3	23.19	239	90.2	230/460	11.4	1, 30
	900	256T	EM2508T	5,933	GO3	24.19	260	89.5	230/460	11.7	1, 30
10	3600	213T	EM3312T	2,371	GO3	16.32	121	90.2	230/460	12.0	1, 30
	1800	215T	EM3313T	2,444	GO3	17.45	128	91.7	230/460	12.5	1, 30
	1200	256T	EM2511T	3,726	GO3	23.19	255	91.7	230/460	14.3	1, 30
15	3600	215T	EM3314T	3,367	GO3	16.32	124	90.2	230/460	17.5	1, 30
	1800	254T	EM2513T	3,460	GO3	23.19	250	93.0	230/460	18.2	1, 30
		254T	EM2513T-CI	3,710	GO3	20.62	238	93.0	230/460	17.8	1, 30
	1200	284T	EM2524T	5,024	GO3	23.81	278	91.7	230/460	20.5	1, 30
20	3600	254T	EM2514T	3,955	GO3	21.69	191	91.0	230/460	23.5	1, 30
	1800	256T	EM2515T	4,276	GO3	23.19	241	93.0	230/460	24.0	1, 30
		256T	EM2515T-12	4,846	GO3	23.19	225	93.0	230/460	24.0	1, 25, 30
		256T	EM2515T-CI	4,662	GO3	22.37	281	93.0	230/460	24.0	1, 30
	1200	286T	EM2528T	6,114	GO3	25.06	330	92.4	230/460	27.0	1, 30
25	3600	256T	EM2516T	4,749	GO3	21.69	222	91.7	230/460	28.0	1, 30
	1800	284T	EM2531T	5,213	GO3	25.06	377	93.6	230/460	29.0	1, 30
		284T	EM2531T-12	6,117	GO3	25.06	307	93.6	230/460	30.0	1, 25, 30
		286T	EM2531T-CI	5,683	GO3	24.94	400	93.6	230/460	31.0	1, 30
1200	324T	EM2532T	7,385	GO3	27.69	411	93.0	230/460	34.0	1, 30	
30	3600	284TS	EM2534T	5,605	GO3	22.44	308	91.7	230/460	35.0	1, 30
	1800	286T	EM2535T	5,701	GO3	26.06	378	94.1	230/460	36.0	1, 30
		286T	EM2535T-12	6,605	GO3	26.06	339	94.1	230/460	36.0	1, 25, 30
		286T	EM2535T-CI	6,213	GO3	24.94	405	94.1	230/460	38.0	1, 30
	1200	326T	EM2536T	7,703	GO3	28.69	380	93.6	230/460	39.0	1, 30
40	3600	286TS	EM2538T	7,221	GO3	22.44	329	92.4	230/460	46.0	1, 30
	1800	286TS	EM2538T-CI	7,871	GO3	23.56	402	92.4	230/460	46.0	1, 30
		324T	EM2539T	7,436	GO3	27.19	396	94.1	230/460	49.0	1, 30
		324T	EM2539T-12	8,838	GO3	27.19	402	94.1	230/460	47.0	1, 25, 30
	324T	EM2539T-CI	8,107	GO3	26.13	538	94.1	230/460	48.0	1, 30	
50	1200	364T	EM2540T	10,418	GO3	30.69	598	94.1	230/460	51.0	1, 30
	3600	364T	EM2540T-CI	10,973	GO3	29.70	801	94.1	230/460	49.4	1, 30
		324TS	EM2542T	7,864	GO3	25.69	380	93.0	230/460	56.0	1, 30
		324TS	EM2542T-CI	8,918	GO3	24.63	548	93.0	230/460	56.0	1, 30
	1800	326T	EM2543T	8,205	GO3	27.69	467	94.5	230/460	57.0	1, 30
50	1800	326T	EM2543T-12	9,607	GO3	27.69	468	94.5	230/460	61.0	1, 25, 30
		326T	EM2543T-CI	8,946	GO3	27.63	570	94.5	230/460	60.0	1, 30

Cast iron frame

TOC INFO SP4 GP SD WD XP PUMP HVAC DP UH BRM VSAC IMD DCPM DCSW DCSW GRDS BUFF LATH GBPA ACPA DCPA ACC MDEX INDX NOTE

General Purpose, three phase, ODP, foot mounted

Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt											
50	1800	326TS	EM2543TS-12	9,607	GO3	26.19	469	94.5	230/460	61.0	1, 25, 30
	1200	365T	EM2544T	12,582	GO3	33.72	762	94.1	230/460	62.0	1, 30
		365T	EM2544T-CI	13,285	GO3	29.70	722	94.1	230/460	60.3	1, 30
60	3600	326TS	EM2546T	9,951	GO3	25.19	457	93.6	230/460	68.0	1, 30
	1800	364T	EM2547T	10,331	GO3	30.69	619	95.0	230/460	68.0	1, 30
		364T	EM2547T-12	12,534	GO3	30.69	620	95.0	230/460	68.0	1, 25, 30
		364T	EM2547T-CI	11,260	GO3	29.70	745	95.0	230/460	69.5	1, 30
		364TS	EM2547TS-12	12,534	GO3	28.56	613	95.0	230/460	68.0	1, 25, 30
	1200	404T	EM2548T	15,500	GO3	34.47	654	94.5	230/460	76.0	1, 30
	3600	364TS	EM2549T	13,051	GO3	25.81	502	93.6	230/460	82.0	1, 30
75	1800	365T	EM2551T	12,681	GO3	33.72	744	95.0	230/460	85.0	1, 30
		365T	EM2551T-12	14,884	GO3	33.72	758	95.0	230/460	87.0	1, 25
		365T	EM2551T-CI	13,819	GO3	29.70	762	95.0	230/460	86.5	1, 30
		365TS	EM2551TS-12	14,884	GO3	31.59	749	95.0	230/460	87.0	1, 25
	3600	365TS	EM2550T	13,952	GO3	27.81	562	93.6	230/460	110.0	1, 30
100	1800	404T	EM2555T	14,752	GO3	34.47	575	95.4	230/460	118.0	1, 30
		404T	EM2555T-12	17,952	GO3	36.97	946	95.4	230/460	118.0	1, 25
		404T	EM2555T-CI	16,080	GO3	34.00	1038	95.4	230/460	115.0	1, 30
		404TS	EM2555TS-12	17,952	GO3	33.97	941	95.4	230/460	118.0	1, 25
460 volt											
60	1200	404T	EM2548T-4CI	16,865	GO3	33.95	1009	95.0	460	70.4	1
75	1200	405T	EM2552T-4	18,777	GO3	33.95	1084	95.0	460	86.9	1, 25
100	1800	404T	EM2555T-4	14,752	GO3	36.97	896	95.4	460	118.0	1, 25
	1200	444T	EM2583T-4	20,667	GO3	39.56	1455	95.0	460	116.0	1, 25
125	3600	404TS	EM2554T-4	17,509	GO3	31.85	894	94.1	460	143.0	1, 25
		404TS	EM2554T-4CI	20,891	GO3	31.00	997	95.0	460	143.0	1
	1800	405T	EM2559T-4	18,099	GO3	34.47	955	95.4	460	143.0	1, 25
		405T	EM2559T-4CI	19,724	GO3	34.00	1118	95.4	460	141.0	1
		405TS	EM2559TS-4	18,099	GO3	34.97	966	95.4	460	143.0	1, 25
150	1200	445T	EM2557T-4	22,321	GO3	39.71	1513	95.0	460	146.0	1, 25
	3600	405TS	EM2556T-4	21,599	GO3	31.85	801	94.1	460	166.0	1, 25
		444T	EM2558T-4	20,103	GO3	39.71	1528	96.2	460	170.0	1, 25
	1800	444TS	EM2558TS-4	20,103	GO3	35.96	1508	96.2	460	170.0	1
200	1200	445T	EM2560T-4	26,286	GO3	39.71	1572	95.4	460	175.0	1, 25
	3600	444TS	EM2562T-4	24,476	GO3	35.88	1364	95.4	460	221.0	1, 25
	1800	445T	EM2563T-4	25,122	GO3	39.56	1625	95.8	460	222.0	1, 25
250	1200	447T	EM2564T-4	34,554	GO3	43.06	1827	95.4	460	232.0	1, 25
	3600	445TS	EM2565T-4	28,713	GO3	35.88	1539	95.4	460	274.0	1, 25
300	1800	447T	EM25254T-4	28,171	GO3	43.12	2015	96.2	460	275.0	1, 25
	3600	445TS	EM2568T-4	44,878	GO3	35.88	1539	95.4	460	339.0	1, 25
350	1800	449T	EM25694T-4	42,960	GO3	48.13	2151	95.8	460	331.0	1, 25
	3600	449TS	EM2571T-4	51,360	GO3	44.31	2100	95.4	460	380.0	1, 25
400	1800	449T	EM2572T-4	50,744	GO3	48.12	2694	96.2	460	382.0	1, 25
	3600	449TS	EM25402T-4	60,255	GO3	44.31	2100	96.2	460	431.0	1, 25
450	1800	449T	EM25404T-4	55,073	GO3	48.12	2799	96.2	460	437.0	1, 25
	3600	449TS	EM25452T-4	66,351	GO3	44.31	2132	96.2	460	494.0	1, 25

Cast iron frame

General Purpose, three phase, ODP, foot mounted

Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
460 volt											
450	1800	449T	EM25454T-4	62,284	GO3	48.12	2475	96.2	460	507.0	1, 25
575 volt											
1/3	1800	56	EM31104-5	743	GO3	9.51	24	73.4	575	0.5	15, 38
1/2	1800	56	EM31108-5	818	GO3	11.01	31	78.2	575	0.7	15, 38
3/4	1800	56	EM31112-5	901	GO3	11.07	33	82.5	575	0.9	15
1	1800	56	EM31116-5	948	GO3	12.07	38	85.5	575	1.3	15
		143T	EM3116T-5	1,039	GO3	11.62	34	85.5	575	1.3	1
1 1/2	1800	145T	EM3154T-5	1,087	GO3	11.62	37	86.5	575	1.8	1
2	1800	145T	EM3157T-5	1,164	GO3	11.62	39	86.5	575	2.3	1
3	1800	182T	EM3211T-5	1,255	GO3	15.00	69	89.5	575	3.4	1
5	3600	182T	EM3212T-5	1,307	GO3	15.00	76	90.2	575	4.5	1
	1800	184T	EM3218T-5	1,375	GO3	16.50	82	89.5	575	5.3	1
7 1/2	3600	184T	EM3219T-5	2,073	GO3	16.50	92	90.2	575	6.7	1
	1800	213T	EM3311T-5	2,019	GO3	16.32	114	91.0	575	8.0	1
10	1800	215T	EM3313T-5	2,444	GO3	17.45	123	91.7	575	10.0	1
15	1800	254T	EM2513T-5	3,460	GO3	23.19	212	93.0	575	14.2	1
20	1800	256T	EM2515T-5	4,276	GO3	23.19	227	93.0	575	19.1	1
25	1800	284T	EM2531T-5	5,213	GO3	25.06	660	93.6	575	24.5	1
30	1800	286T	EM2535T-5	5,701	GO3	26.06	368	94.1	575	29.0	1
40	1800	324T	EM2539T-5	7,436	GO3	27.19	398	94.1	575	40.0	1
50	1800	326T	EM2543T-5	8,205	GO3	27.69	630	94.5	575	46.0	1
60	1800	364T	EM2547T-5	10,331	GO3	30.69	430	95.0	575	56.0	1
75	1800	365T	EM2551T-5	12,681	GO3	33.72	729	95.0	575	68.0	1
100	1800	404T	EM2555T-5	14,752	GO3	36.97	943	95.4	575	93.0	1
125	1800	405T	EM2559T-5	18,099	GO3	34.47	960	95.4	575	114.0	1
150	1800	444T	EM2558T-5	20,103	GO3	39.56	1515	96.2	575	136.0	1

Cast iron frame

TOC INFO SP4 GP SD WD XP PUMP HVAC BRM VSAC IMD DCPM DCSW DCSW LATH GBPA ACPA ACC MDEX INDX NOTE

General Purpose, three phase, ODP, C-face foot mounted


Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt											
1/3	1800	56C	CEM31104	789	GO3	10.10	24	73.4	230/460	0.7	15, 30, 38
1/2	3600	56C	CEM31107	840	GO3	10.10	20	73.4	230/460	0.8	15, 30, 38
	1800	56C	CEM31108	865	GO3	11.60	31	78.2	230/460	0.8	15, 30, 38
3/4	1800	56C	CEM31112	947	GO3	11.07	35	82.5	230/460	1.1	15, 30
	3600	56C	CEM31115	1,018	GO3	11.07	37	78.5	230/460	1.5	15
1	1800	143TC	CEM3116T	1,233	GO3	11.63	35	85.5	230/460	1.6	1, 30
	1200	145TC	CEM3156T	1,260	GO3	17.07	41	82.5	230/460	1.8	1
1 1/2	3600	143TC	CEM3120T	1,070	GO3	17.07	34	84.0	230/460	2.0	1
	1800	145TC	CEM3154T	1,286	GO3	11.62	31	86.5	230/460	2.3	1, 30
2	1200	182TC	CEM3207T	1,520	GO3	15.00	68	86.5	230/460	2.5	1
	3600	56C	CEM31155	1,153	GO3	12.07	43	85.5	230/460	2.6	15, 30
3	1800	145TC	CEM3157T	1,373	GO3	12.13	41	86.5	230/460	2.8	1, 30
	1200	184TC	CEM3215T	1,551	GO3	16.50	82	87.5	230/460	3.4	1
5	3600	143TC	CEM3158T	1,260	GO3	13.01	46	85.5	230/460	3.8	1, 30
	1800	182TC	CEM3211T	1,531	GO3	15.00	71	89.5	230/460	4.2	1, 30
7 1/2	1200	213TC	CEM3305T	2,090	GO3	17.07	131	88.5	230/460	4.5	1
	3600	182TC	CEM3212T	1,426	GO3	13.62	64	86.5	230/460	6.0	1, 30
	1800	184TC	CEM3218T	1,666	GO3	16.50	87	89.5	230/460	6.6	1, 30
10	1200	215TC	CEM3309T	2,656	GO3	18.19	141	89.5	230/460	7.4	1
	3600	184TC	CEM3219T	2,192	GO3	15.00	77	88.5	230/460	8.6	1, 30
	1800	213TC	CEM3311T	2,541	GO3	17.07	118	91.0	230/460	9.8	1, 30
15	1200	254TC	CEM2506T	3,399	GO3	23.19	248	90.2	230/460	11.0	1
	3600	213TC	CEM3312T	2,638	GO3	17.07	121	90.2	230/460	12.0	1, 30
	1800	215TC	CEM3313T	3,020	GO3	18.19	133	91.7	230/460	12.5	1, 30
20	1200	256TC	CEM2511T	4,262	GO3	23.19	255	91.7	230/460	14.3	1, 30
	3600	215TC	CEM3314T	3,634	GO3	17.07	128	90.2	230/460	17.5	1, 30
	1800	254TC	CEM2513T	4,433	GO3	23.19	233	93.0	230/460	18.2	1, 30
25	1200	284TC	CEM2524T	5,984	GO3	23.81	295	91.7	230/460	20.5	1, 30
	3600	254TC	CEM2514T	4,490	GO3	21.69	194	91.0	230/460	23.5	1, 30
	1800	256TC	CEM2515T	4,812	GO3	23.19	231	93.0	230/460	24.0	1, 30
30	1200	286TC	CEM2528T	7,074	GO3	25.06	369	92.4	230/460	27.0	1, 30
	3600	256TC	CEM2516T	5,284	GO3	21.69	219	91.7	230/460	28.0	1, 30
	1800	284TC	CEM2531T	6,173	GO3	25.06	336	93.6	230/460	30.0	1, 30
40	1200	324TC	CEM2532T	8,717	GO3	27.69	383	93.0	230/460	34.0	1, 30
	3600	284TSC	CEM2534T	6,565	GO3	22.44	320	91.7	230/460	35.0	1, 30
	1800	286TC	CEM2535T	6,661	GO3	26.06	355	94.1	230/460	36.0	1, 30
50	1200	326TC	CEM2536T	9,035	GO3	28.69	482	93.6	230/460	39.0	1, 30
	3600	286TSC	CEM2538T	8,181	GO3	22.44	330	92.4	230/460	46.0	1, 30
	1800	324TC	CEM2539T	8,769	GO3	27.19	378	94.1	230/460	49.0	1, 30
60	3600	324TSC	CEM2542T	9,197	GO3	25.68	375	93.0	230/460	56.0	1
	1800	326TC	CEM2543T	9,537	GO3	27.69	491	94.5	230/460	57.0	1, 30
60	3600	326TSC	CEM2546T	11,283	GO3	25.19	472	93.6	230/460	68.0	1

General Purpose, three phase, ODP, C-face foot mounted

Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt											
60	1800	364TC	CEM2547T	11,868	GO3	30.69	542	95.0	230/460	68.0	1, 30
75	3600	364TSC	CEM2549T	14,588	GO3	25.81	475	93.6	230/460	82.0	1
	1800	365TC	CEM2551T	14,217	GO3	33.72	457	95.0	230/460	85.0	1, 30
100	3600	365TSC	CEM2550T	15,489	GO3	27.81	574	93.6	230/460	110.0	1
	1800	404TC	CEM2555T	16,526	GO3	36.97	945	95.4	230/460	118.0	1, 30
460 volt											
125	3600	404TSC	CEM2554T-4	19,282	GO3	33.59	590	94.1	460	143.0	1, 25
	1800	405TC	CEM2559T-4	19,872	GO3	37.97	787	95.4	460	143.0	1, 25

General Purpose, three phase, ODP, C-face with footless


Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes	
230/460 volt												
1/4	1800	56C	KEM30003	749	GO3	11.35	21	69.5	230/460	0.5	15, 30, 38	
1/3	3600	56C	KEM30006	784	GO3	11.22	22	69.5	230/460	0.6	15, 30, 38	
	1800	56C	VEM31104	789	GO3	11.22	24	73.4	230/460	0.7	15, 30, 38	
1/2	3600	56C	VEM31107	840	GO3	11.22	24	73.4	230/460	0.8	15, 30, 38	
	1800	56C	VEM31108	865	GO3	12.72	31	78.2	208-230/460	0.8	15, 30, 38	
	1200	56C	VEM31109	940	GO3	13.35	34	75.3	230/460	1.0	15, 30, 38	
3/4	3600	56C	VEM31111	837	GO3	11.22	25	76.8	230/460	1.2	15, 30, 38	
	1800	56C	VEM31112	947	GO3	12.22	32	82.5	230/460	1.1	15, 30	
	1200	56C	VEM31153	1,146	GO3	13.22	39	81.7	230/460	1.3	15, 30	
			143TC	VM3153T	998	GO3	13.41	32	77.0	230/460	1.5	30, 38
1	3600	56C	VEM31115	856	GO3	11.84	27	77.0	208-230/460	1.6	15, 30, 38	
	1800	56C	VEM31116	995	GO3	12.22	37	85.5	230/460	1.6	15, 30	
			143TC	VEM3116T	1,233	GO3	12.25	38	85.5	230/460	1.6	1, 30
	1200	145TC	VEM3156T	1,260	GO3	13.25	39	82.5	230/460	1.8	1, 30	
1 1/2	3600	56C	VEM31120	883	GO3	12.22	34	84.0	208-230/460	2.0	15, 30	
			143TC	VEM3120T	1,070	GO3	12.25	34	84.0	208-230/460	2.0	1, 30
	1800	56C	VEM31154	1,085	GO3	13.22	35	86.5	230/460	2.2	15, 30	
			145TC	VEM3154T	1,286	GO3	13.25	37	86.5	230/460	2.3	1, 30
2	1200	145TC	VEM3159T	1,464	GO3	15.92	68	86.5	230/460	2.5	1, 30	
	3600	56C	VEM31155	1,153	GO3	13.22	43	85.5	230/460	2.6	15, 30	
			143TC	VEM3155T	1,245	GO3	13.25	43	86.5	208-230/460	2.5	1, 30
	1800	56C	VEM31157	1,136	GO3	13.22	48	86.5	230/460	2.8	15, 30	
			145TC	VEM3157T	1,220	GO3	13.25	43	86.5	230/460	2.8	1, 30
	1200	184TC	VEM3215T	1,551	GO3	18.03	82	87.5	230/460	3.4	1, 30	
3	3600	56C	VEM31158	1,102	GO3	13.22	50	85.5	230/460	3.8	15, 30	
			145TC	VEM3158T	1,260	GO3	13.25	50	85.5	230/460	3.8	1, 30
	1800	145TC	VEM3161T	1,307	GO3	15.92	74	89.5	230/460	4.2	1, 30	
			182TC	VEM3211T	1,531	GO3	16.54	74	89.5	230/460	4.2	1, 30
5	1200	213TC	VEM3305T	2,090	GO3	18.91	137	88.5	230/460	4.5	1, 30	
	3600	182TC	VEM3212T	1,426	GO3	16.54	64	86.5	230/460	6.0	1, 30	
	1800	184TC	VEM3218T	1,666	GO3	18.03	92	89.5	230/460	6.6	1, 30	
	1200	215TC	VEM3309T	2,656	GO3	20.03	141	89.5	230/460	7.4	1, 30	
7 1/2	3600	184TC	VEM3219T	2,192	GO3	16.54	77	88.5	208-230/460	8.7	1, 30	
	1800	213TC	VEM3311T	2,541	GO3	18.91	120	91.0	230/460	9.8	1, 30	
10	3600	213TC	VEM3312T	2,638	GO3	18.91	121	90.2	208-230/460	12.0	1, 30	
	1800	215TC	VEM3313T	3,020	GO3	20.03	132	91.7	230/460	12.5	1, 30	
15	3600	215TC	VEM3314T	3,634	GO3	18.91	131	90.2	230/460	17.5	1, 30	
	1800	254TC	VEM2513T	4,433	GO3	24.15	234	93.0	230/460	18.2	1, 30	
20	3600	254TC	VEM2514T	4,490	GO3	22.12	185	91.0	230/460	23.5	1, 30	
	1800	256TC	VEM2515T	4,812	GO3	23.28	238	93.0	230/460	24.0	1, 30	
25	3600	254TC	VEM2516T	5,284	GO3	22.15	233	91.7	230/460	28.0	1, 30	

General Purpose, three phase, ODP, C-face with footless

Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/460 volt											
25	1800	284TC	VEM2531T	6,173	GO3	26.71	377	93.6	230/460	30.0	1, 30
30	3600	284TSC	VEM2534T	6,565	GO3	25.09	325	91.7	208-230/460	35.0	1, 30

General Purpose, three phase, ODP, foot mounted F2



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
200 volt											
2	1800	145T	EFM3157T-8	1,324	GO3	12.13	40	86.5	200	6.0	1, 68
3	1800	182T	EFM3211T-8	1,433	GO3	15.00	70	89.5	200	9.7	1, 68
5	1800	184T	EFM3218T-8	1,574	GO3	16.50	82	89.5	200	15.3	1, 68
7 1/2	1800	213T	EFM3311T-8	2,307	GO3	16.32	111	91.0	200	23.3	1, 68
10	1800	215T	EFM3313T-8	2,793	GO3	17.45	127	91.7	200	29.5	1, 68
15	1800	254T	EFM2513T-8	3,942	GO3	23.19	209	93.0	200	41.0	1, 68
20	1800	256T	EFM2515T-8	4,326	GO3	23.19	240	93.0	200	55.0	1, 24, 69
230/460 volt											
1	1800	143T	EFM3116T	1,171	GO3	11.13	35	85.5	230/460	1.6	1, 30
1 1/2	1800	145T	EFM3154T	1,223	GO3	11.62	38	86.5	230/460	2.3	1, 30
2	1800	145T	EFM3157T	1,311	GO3	12.13	40	86.5	230/460	2.8	1, 30
3	1800	182T	EFM3211T	1,413	GO3	15.00	68	89.5	230/460	4.2	1, 30
5	3600	182T	EFM3212T	1,307	GO3	13.62	61	86.5	230/460	6.0	1, 30
	1800	184T	EFM3218T	1,548	GO3	16.50	84	89.5	230/460	6.6	1, 30
7 1/2	3600	184T	EFM3219T	2,073	GO3	15.00	77	88.5	230/460	8.6	1, 30
	1800	213T	EFM3311T	2,274	GO3	16.32	114	91.0	230/460	9.8	1, 30
10	3600	213T	EFM3312T	2,371	GO3	16.32	107	90.2	230/460	12.0	1, 30
	1800	215T	EFM3313T	2,753	GO3	17.45	125	91.7	230/460	12.5	1, 30
15	3600	215T	EFM3314T	3,367	GO3	16.32	123	90.2	230/460	17.5	1, 30
	1800	254T	EFM2513T	3,898	GO3	23.19	214	93.0	230/460	18.2	1, 30
20	1800	256T	EFM2515T	4,276	GO3	23.19	226	93.0	230/460	24.0	1, 30
25	1800	284T	EFM2531T	5,213	GO3	25.06	313	93.6	230/460	29.0	1, 30
30	1800	286T	EFM2535T	5,701	GO3	26.06	339	94.1	230/460	36.0	1, 30
40	1800	324T	EFM2539T	7,436	GO3	27.19	392	94.1	230/460	49.0	1, 30
50	1800	326T	EFM2543T	8,205	GO3	27.69	464	94.5	230/460	57.0	1, 30
60	1800	364T	EFM2547T	10,331	GO3	30.69	622	95.0	230/460	68.0	1, 30

General Purpose, three phase, 50Hz, ODP, foot mounted

- All motors listed are specifically designed for operation with 50Hz power
- CE Certified and Compliant to EU efficiency regulations



Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
230/400 volt, 50Hz											
1/2	1500	56	M3108-57	647	503	10.12	26	73.0	230/400	1.0	
3/4	1500	56	M3112-57	720	503	10.14	26	70.0	230/400	1.9	
1	1500	56	EM3116-57	937	503	11.07	34	82.5	230/400	1.8	1
		143T	EM3116T-57	942	503	11.12	34	82.5	230/400	1.8	1
1 1/2	1500	145T	EM3154T-57	1,001	503	12.13	41	84.2	230/400	2.9	1
2	1500	145T	EM3157T-57	1,029	503	12.13	45	85.3	230/400	3.4	1
3	1500	182T	EM3211T-57	1,177	503	15.00	74	86.7	230/400	4.9	1
5	1500	184T	EM3218T-57	1,303	503	16.50	101	88.4	230/400	8.0	1
400 volt, 50Hz											
7 1/2	1500	213T	EM3311T-58	1,841	503	17.45	127	89.6	400	10.8	1
10	1500	215T	EM3313T-58	3,002	503	18.95	165	90.4	400	14.3	1
15	1500	254T	EM2513T-58	4,250	503	21.69	230	91.4	400	21.4	1
20	1500	256T	EM2515T-58	4,662	503	23.19	275	92.1	400	28.0	1

GNEM, General Purpose, three phase, Open 1 thru 20 Hp (.75 - 15kW)

Features

- 50/60 Hz design
- Designed for longevity with 3 year warranty
- Suitable for inverter use per NEMA MG1 Part 31.4.4.2

Applications

- Fans
- Pumps
- Blowers
- Air handling
- HVAC systems
- General purpose applications

IP22

GNEM General Purpose, three phase, ODP, foot mounted

Global NEMA motor dual frequency 50/60 Hz ratings on nameplate
Broad voltage range 208-230/460//190/380



kW/Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
190/380V 50Hz // 208-230/460V 60Hz											
0.75//1	1500//1800	56	GNEM31116	1,233	GO3	11.13	37	85.5	190/380//208-230/460	1.7	1
		143T	GNEM3116T	1,351	GO3	11.63	37	85.5	190/380//208-230/460	1.7	1
	1000//1200	56	GNEM31156	1,736	GO3	12.06	41	82.5	190/380//208-230/460	1.8	1
		145T	GNEM3156T	1,771	GO3	12.13	41	82.5	190/380//208-230/460	1.8	1
1.1//1-1/2	1500//1800	56	GNEM31154	1,351	GO3	12.06	41	86.5	190/380//208-230/460	2.3	1
		145T	GNEM3154T	1,413	GO3	12.13	41	86.5	190/380//208-230/460	2.3	1
	1000//1200	182T	GNEM3207T	1,821	GO3	15.00	68	86.5	190/380//208-230/460	2.5	1
1.5//2	1500//1800	56	GNEM31157	1,417	GO3	12.94	48	86.5	190/380//208-230/460	2.8	1
		145T	GNEM3157T	1,513	GO3	13.00	48	86.5	190/380//208-230/460	2.8	1
	1000//1200	184T	GNEM3215T	1,863	GO3	16.50	82	87.5	190/380//208-230/460	3.4	1
2.2//3	1500//1800	182T	GNEM3211T	1,626	5O3	16.50	83	90.2	190/380//208-230/460	4.4	1
	1000//1200	213T	GNEM3305T	2,370	GO3	16.32	119	88.5	190/380//208-230/460	4.5	1
3.7//5	1500//1800	184T	GNEM3218T	1,781	GO3	16.50	98	90.2	190/380//208-230/460	6.8	1
	1000//1200	215T	GNEM3309T	3,106	GO3	17.45	141	89.5	190/380//208-230/460	7.4	1
5.5//7-1/2	1500//1800	213T	GNEM3311T	2,618	GO3	17.45	140	91.7	190/380//208-230/460	9.7	1
5//7-1/2	1000//1200	254T	GNEM2506T	3,723	GO3	23.19	248	90.2	190/380//208-230/460	12.7	1
7.5//10	1500//1800	215T	GNEM3313T	3,177	GO3	17.45	143	91.7	190/380//208-230/460	13.7	1
	1000//1200	256T	GNEM2511T	4,844	GO3	24.19	288	91.7	190/380//208-230/460	15.5	1
11//15	1500//1800	254T	GNEM2513T	4,498	GO3	23.19	250	93.0	190/380//208-230/460	19.0	1
		254T	GNEM2513T-CI	4,267	GO3	22.38	286	93.0	190/380//208-230/460	20.0	1
	1000//1200	284T	GNEM2524T	6,531	GO3	25.06	369	91.7	190/380//208-230/460	20.0	1
15//20	1500//1800	254T	GNEM2515T	5,559	GO3	23.19	290	93.0	190/380//208-230/460	25.0	1
		256T	GNEM2515T-CI	6,061	GO3	22.38	286	93.0	190/380//208-230/460	24.0	1
	1000//1200	286T	GNEM2528T	7,948	GO3	26.06	375	92.4	190/380//208-230/460	29.0	1

Cast iron frame

Red catalog number indicates **NEW** product

GNEM, General Purpose, three phase, enclosed

1 thru 20 Hp (.75 - 15kW)

Features

- 50/60 Hz design
- Designed for longevity with 3 year warranty
- Suitable for inverter use per NEMA MG1 Part 31.4.4.2

Applications

- Fans
- Pumps
- Blowers
- Air handling
- HVAC systems
- General purpose applications

IP44*

GNEM General Purpose, three phase, TEFC, foot mounted

Global NEMA motor dual frequency 50/60 Hz ratings on nameplate
Broad voltage range 208-230/460//190/380



kW/Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
190/380V 50Hz // 208-230/460V 60Hz											
0.75//1	1500//1800	56	GNEM3546	1,403	GE3	13.22	37	85.5	190/380//208-230/460	1.7	1
		143T	GNEM3546T	1,403	GE3	13.29	37	85.5	190/380//208-230/460	1.7	1
	1000//1200	56	GNEM3556	1,811	GE3	13.23	41	82.5	190/380//208-230/460	1.8	1
		145T	GNEM3556T	1,811	GE3	13.29	41	82.5	190/380//208-230/460	1.8	1
1.1//1-1/2	1500//1800	56	GNEM3554	1,559	GE3	13.22	41	86.5	190/380//208-230/460	2.3	1
		145T	GNEM3554T	1,559	GE3	13.29	41	86.5	190/380//208-230/460	2.3	1
	1000//1200	182T	GNEM3607T	2,118	GE3	18.04	90	87.5	190/380//208-230/460	2.5	1
		182T	GNEM3667T	2,605	GE3	15.24	105	87.5	190/380//208-230/460	2.5	1
1.5//2	1500//1800	56	GNEM3558	1,649	GE3	14.10	48	86.5	190/380//208-230/460	2.8	1
		145T	GNEM3558T	1,649	GE3	14.17	48	86.5	190/380//208-230/460	2.8	1
	1000//1200	184T	GNEM3614T	2,220	GE3	18.05	91	88.5	190/380//208-230/460	3.3	1
		184T	GNEM3664T	2,648	GE3	15.23	113	88.5	190/380//208-230/460	3.3	1
2.2//3	1500//1800	182T	GNEM3611T	1,687	GE3	16.55	83	90.2	190/380//208-230/460	4.4	1
		182T	GNEM3661T	2,137	GE3	15.24	108	90.2	190/380//208-230/460	4.4	1
	1000//1200	213T	GNEM3704T	2,887	GE3	19.02	138	89.5	190/380//208-230/460	4.5	1
		213T	GNEM3764T	3,299	GE3	18.45	194	89.5	190/380//208-230/460	4.5	1
3.7//5	1500//1800	184T	GNEM3615T	1,741	GE3	18.05	101	90.2	190/380//208-230/460	6.6	1
		184T	GNEM3665T	2,185	GE3	15.24	115	90.2	190/380//208-230/460	6.5	1
	1000//1200	215T	GNEM3708T	3,263	GE3	20.52	149	89.5	190/380//208-230/460	7.4	1
		215T	GNEM3768T	3,827	GE3	18.45	226	89.5	190/380//208-230/460	7.3	1
5.5//7-1/2	1500//1800	213T	GNEM3710T	2,512	GE3	19.02	148	91.7	190/380//208-230/460	9.8	1
		213T	GNEM3770T	2,850	GE3	18.45	191	91.7	190/380//208-230/460	9.8	1
5//7-1/2	1000//1200	254T	GNEM2276T	5,456	GE3	23.36	299	91.0	190/380//208-230/460	11.4	1
7.5//10	1500//1800	215T	GNEM3714T	2,845	GE3	20.52	165	91.7	190/380//208-230/460	13.0	1
		215T	GNEM3774T	3,195	GE3	18.45	196	92.4	190/380//208-230/460	12.3	1
	1000//1200	256T	GNEM2332T	6,227	GE3	23.36	322	91.0	190/380//208-230/460	16.8	1

Cast iron frame

Red catalog number indicates **NEW** product

GNEM General Purpose, three phase,TEFC, foot mounted

Global NEMA motor dual frequency 50/60 Hz ratings on nameplate
Broad voltage range 208-230/460//190/380

kW/Hp	RPM	Frame	Catalog Number	List Price	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Eff.	Voltage	Full Load Amps	Notes
190/380V 50Hz // 208-230/460V 60Hz											
11//15	1500//1800	254T	GNEM2333T	3,877	GE3	23.36	286	92.4	190/380//208-230/460	18.4	1
	1000//1200	284T	GNEM4100T	8,306	GE3	27.76	451	91.7	190/380//208-230/460	20.0	1
15//20	1500//1800	256T	GNEM2334T	5,313	GE3	23.36	322	93.0	190/380//208-230/460	24.0	1
	1000//1200	286T	GNEM4102T	11,059	GE3	27.76	451	91.7	190/380//208-230/460	29.0	1

Cast iron frame

Red catalog number indicates **NEW** product

TOC
INFO
SP4
GP
SD
WD
XP
PUMP
HVAC
FARM
DP
UH
BRM
VSAC
IMD
DCPM
DCSW
GRDS
BUFF
LATH
GBPA
ACPA
DCPA
ACC
MDEX
INDX
NOTE